



Imbued with understated elegance, Lehman emerges as a distinguished indoor wall sconce, perfectly tailored for a spectrum of environments. Whether casting its warm glow in multifamily settings, adding character to hospitality venues, or providing a touch of serenity in religious institutions, its versatility is undeniable. Meticulously designed to blend seamlessly with diverse interiors, Lehman elevates spaces with both its aesthetic charm and impeccable illumination. For those in pursuit of lighting that resonates with style and purpose across varied settings, Lehman shines as the prime choice.

LED Engine

Color Temp (CCT): 3000K, 3500K, 4000K
CRI: 80+ (consult factory for 90+)
Life Expectancy: L70 rated at 50,000+ hours
Binning: 3-step Macadam
Output: Min 1195 Source Lumens
 Max 2305 Source Lumens


Driver

Type: Constant current, Class 2, 120-277 Vac, 50/60Hz
Dimming: 0-10V and phase (leading or trailing edge)
Efficiency: Min 92%
Operating Temp: -40°C / -40°F to 50°C / 122°F
FCC Noise: Meets FCC Title 47 EMC Part 15 limits

Certifications

Location Listing: Damp Location Rated for Wall Mounting
Other: ADA Compliant
 Buy America Compliant

Dimensions

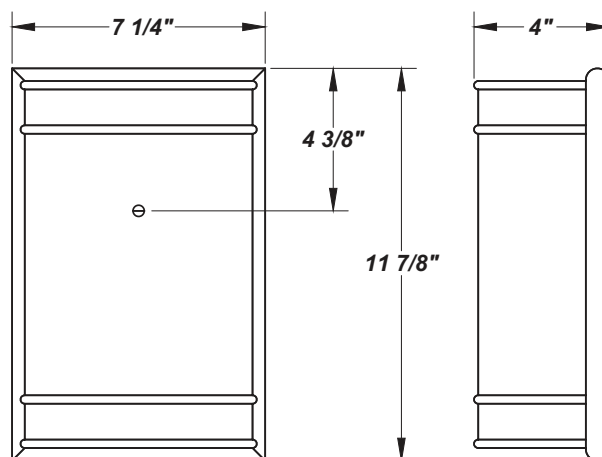

Construction

Mounting Pan: steel with high-reflectance white powder coat. **Trim:** matte chrome resin with white luminous acrylic diffuser
Mounting: wall-mounted above a 4-inch junction box

Catalog String

Fixture Core

LN

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
LN	Not Applicable	L12.5 (LT Only) L17.0	ZE - 0-10V LT - Leading & Trailing Edge	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
STD - Matte Chrome Resin	30K - 3000K 35K - 3500K 40K - 4000K	F - Fused		

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT
L12.5	1195	95.6	3000K
L17.0	2305	135.6	

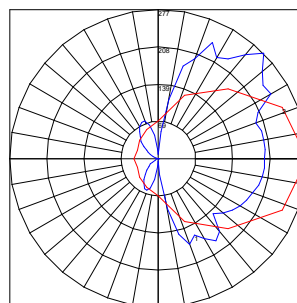

Polar Graph Details:

IES File Name: LED L17.0-WAL-30K.IES

Maximum Candela = 277 Located At
Horizontal Angle = 0, Vertical Angle = 135

1 - Vertical Plane Through Horizontal
Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical
Angle (135) (Through Max. Cd.)