

MASTERS LED

Architectural Outdoor



| | | |
|-----------|--|------|
| PROJECT: | | |
| TYPE: | | |
| PO#: | | QTY: |
| COMMENTS: | | |


FEATURES

- Aluminum Trim Bands w/ Textured Powder Coat Finish
- Standard Up / Down Light Output
- Die-Cast Aluminum Ballast Housing w/ Textured Powder Coat Finish
- Clear Polycarbonate Diffuser
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- 100V - 277V
- Surge Protector
- CSA Listed Wet location For Wall Mounting
- Emergency Battery Available
- LED Light Fixture



LINE DRAWING

LINE DRAWING NOT TO SCALE

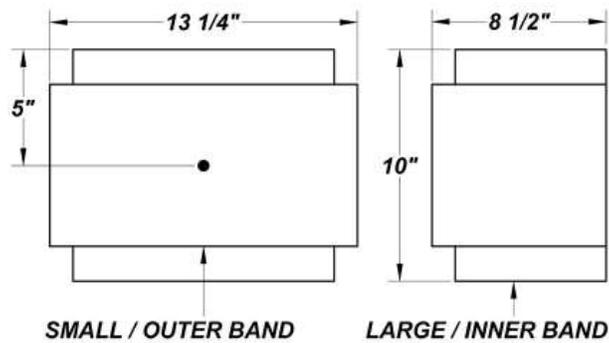

FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Metallic Black



Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

MASTERS LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|--------------|--|----------------|---------------------------|
| MS - Master | L12.3- 12.3W L20.0- 20.0W L26.0- 26.0W L28.0- 28.0W | UNV - 120-277V | 0-10V - 0-10V Dimming (1) |
| ORDER INFO | | | |
| MS | L12.3-12CV | 100 - 270V | 0-10V |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|----------------|--|--|---|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze (Standard) TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | DL - Down Light (L12.3 Only) (4 Modules Directed Down) EB - Integral Emergency Battery (Please Specify Voltage When Ordering) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper-Proof Screw Set UDL - Up / Down Light Only SPD - Surge Protection Device |
| ORDER INFO | | | |
| Not Applicable | AC | 30K | DL |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|---|--|--|--|--|
| MS | L12.3 | <ul style="list-style-type: none"> 80 CRI Typ. 3000K Color Temp 1340 LED Source Lumens 109 LED Source Lumens Per Watt | | | | |
| | L20.0 | <ul style="list-style-type: none"> 80 CRI Typ. 3000K Color Temp 3060 LED Source Lumens 153 LED Source Lumens Per Watt | | | | |
| | L26.0 | <ul style="list-style-type: none"> 80 CRI Typ. 3000K Color Temp 3978 LED Source Lumens 153 LED Source Lumens Per Watt | | | | |
| | L28.0 | <ul style="list-style-type: none"> 80 CRI Typ. 3000K Color Temp 4284 LED Source Lumens 153 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------------------|---------|-----------------------|
| Clear Polycarbonate Diffuser | 34065 | 1. L12.3 NOT DIMMABLE |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SEND CUT-SHEET