

# MASTERS LARGE LED

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES

- Steel Trim Bands w/ Textured Bronze Powder Coat Finish
- Standard Up / Down Light Output
- Die-Cast Aluminum Ballast Housing w/ Textured Black Powder Coat Finish
- Fully Silicone Gasketed Channel
- Clear Prismatic UV-Stabilized Polycarbonate Ribbed Lens
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- 120V Drivers Are Dimmable
- 277V Drivers Are Not Dimmable
- CSA Listed Wet location For Wall Mounting
- Emergency Battery Available
- LED Light Fixture

## LINE DRAWING

LINE DRAWING NOT TO SCALE

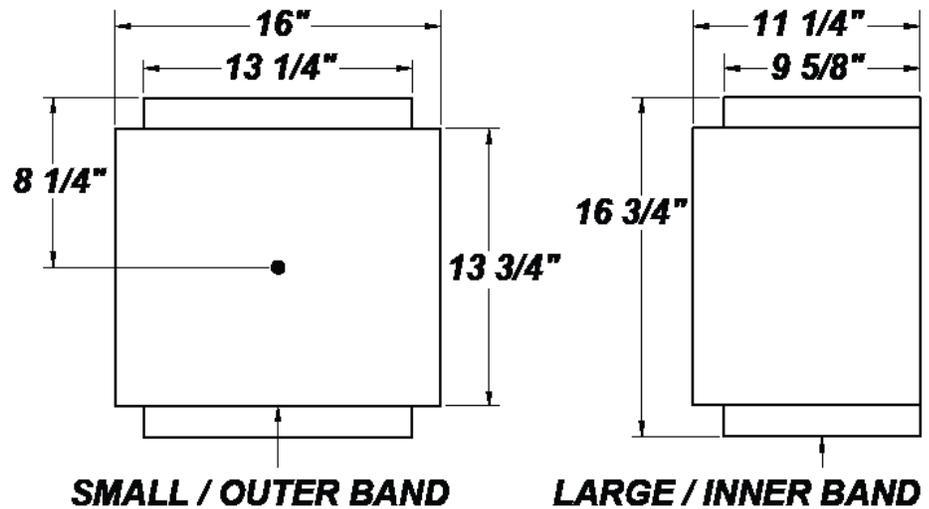

## FINISHES



# MASTERS LARGE LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
MSL - Masters Large	L44.0 - 44.0W (36) LED Array L40.0 - 40.0W (80) LED Array L24.0 - 24.0W (80) LED Array	120V 270V (50 / 60Hz)	Not Applicable
ORDER INFO			
MSL	L44.0	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze (Standard) TW - Textured White	30K - 3000K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB - Integral Emergency Battery (Please Specify Voltage When Ordering) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper-Proof Screw Set SPD - Surge Protection Device
ORDER INFO			
Not Applicable	AC	30K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
MSL	L24.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 2385 LED Source Lumens</li> <li>• 99.4 LED Source Lumens Per Watt</li> </ul>			
	L40.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 3748 LED Source Lumens</li> <li>• 93.7 LED Source Lumens Per Watt</li> </ul>			
	L44.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 4729 LED Source Lumens</li> <li>• 107.5 LED Source Lumens Per Watt</li> </ul>			

REPLACEMENT PART	PART NO	NOTES
Clear Polycarbonate Lens	34195	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.