



Epitomizing sleek elegance, Precept serves as a distinguished wall sconce designed to elevate indoor spaces. Its contemporary design, marked by clean lines and sophisticated aesthetics, finds a harmonious fit in multifamily applications and exudes luxury in hotel environments. Every facet of Precept speaks to attention to detail and an unwavering commitment to style, making it an ideal choice for venues seeking to impress through thoughtfully curated illumination. For those aiming to blend modern allure with timeless charm, Precept shines as the preferred selection.

## LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 1195 Source Lumens  
Max 2390 Source Lumens


## Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

- Location Listing:** Damp Location Rated for Wall Mounting
- Other:** ADA Compliance: ADA Compliant  
Buy America Compliant

## Dimensions

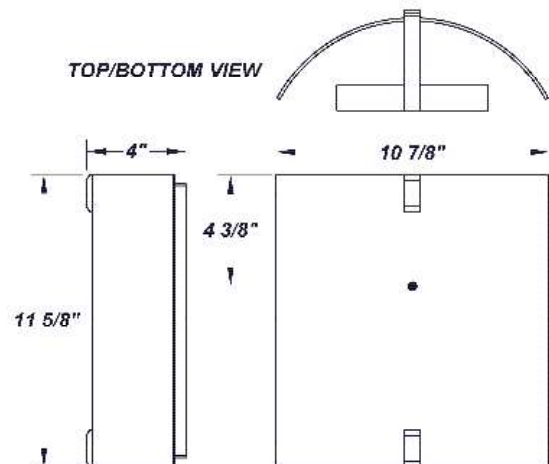

## Construction

**Mounting Pan:** Die-formed Aluminum Mounting Pan with Hi-Reflectance white powder coating. **Trim:** steel with luminous white acrylic lens. **Mounting:** wall-mounted above a 4-inch junction box.

## Catalog String

### Fixture Core

PP

1

2

3

ZE

4

UNIV

5

### Aesthetics & Options

6

7

8

## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
PP	STD (Blank)	L12.5 L25.0	ZE - 0-10V Dimming LT - Leading/Trailing	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	F - Fused		

## Performance

Wattage	Source Lumens	Efficacy LM/W	CCT
L12.5	1195	95.6	3000K
L25.0	2390	95.6	