

Silhouette

Architectural Indoor



A harmonious blend of style and functionality, Silhouette stands out as the epitome of decorative lighting. Its ceiling-mounted fabric drum-style design brings a touch of elegance, making it especially suited for multifamily residences and senior care facilities. Every detail, from the soft illumination to the high-quality fabric, is crafted with care, ensuring that spaces exude warmth and sophistication. With availability in a diverse range of sizes, it caters to bespoke requirements, allowing customers to choose the perfect fit for their space. For those desiring a blend of classic design with modern illumination, Silhouette is the quintessential choice.

LED Engine

Color Temp (CCT): 3000K, 3500K, 4000K
CRI: 80+ (consult factory for 90+)
Life Expectancy: L70 rated at 50,000+ hours
Binning: 3-step Macadam
Output: Min 2100 Source Lumens
Max 8075 Source Lumens

Driver

Type: Constant current, Class 2, 120-277 Vac, 50/60Hz
Dimming: 0-10V
Efficiency: Min 92%
Operating Temp: -40°C / -40°F to 50°C / 122°F
FCC Noise: Meets FCC Title 47 EMC Part 15 limits


Certifications

Location Listing: Damp Location Rated for Ceiling Mounting
Other: Buy America Compliant

Construction

Mounting Pan: stamped steel with Hi-Reflectance white Powder Coat Finish. **Fabric:** wipeable decorative vinyl with embedded fabric. **Diffuser:** Luminous white acrylic diffuser. **Mounting:** Ceiling Mount Only; Mounts Directly to 4-inch junction box.

Dimensions

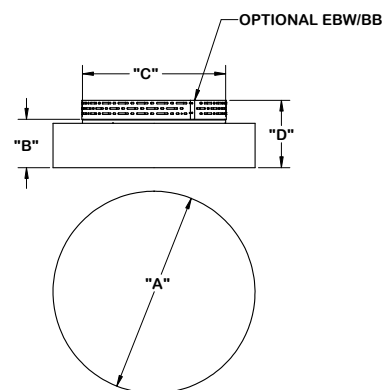

SILHOUETTE	"A"	"B"	"C"	"D"
SHRS12	12 1/4"	4 5/8"	10"	N/A
SHRM15	15"	4 5/8"	12 3/4"	6 3/4"
SHRL19	19"	5 1/4"	17"	7 1/2"
SHRL24	24"	5 1/4"	17"	7 1/2"
SHRL30	30"	8 5/16"	22"	10 1/4"

Trim




Brushed Nickel Vinyl



Gold Vein



Mocha



Natural Linen



White Linen



Catalog String

Fixture Core

SHRS

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
12 - SHRS12 Small 15 - SHRS15 Medium 19 - SHRS19 Large 24 - SHRS24 X-Large 30 - SHRS30 XX-Large	Not Applicable	L13.5 (12 only) L20.5 (15 & 24 only) L21.0 (19 only) L28.5 (19 & 30 only) L30.0 (24 only) L37.5 (19 & 24 only) L50.0 (24 & 30 only)	ZE - 0-10V	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
GVN - Gold Vein MOC - Mocha NLN - Natural Linen WLN - White Linen BNV - Brushed Nickel (<i>Downlight Only</i>)	30K - 3000K 35K - 3500K 40K - 4000K	BB - Back Box F - Fused EB/BB - Back Box Integral EM Battery SPD - Surge Protection Device STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit		

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT	Size
L13.5	2100	155	3000K	12
L20.5	3100	151		15, 24
L21.0	3100	151		19
L28.5	4100	144		19, 30
L30.0	4522	134		24
L37.5	4845	135.5		19, 24
L50.0	8075	161.5		20, 24

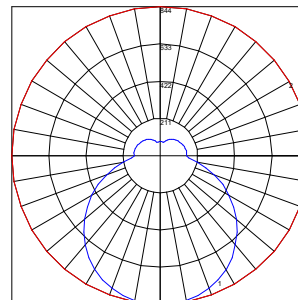

Polar Graph Details:

IES File Name: SHRL-L37.5-ZE1100-GVS-30K.IES

Maximum Candela = 844 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)