

Silhouette

Architectural Indoor



A harmonious blend of style and functionality, Silhouette stands out as the epitome of decorative lighting. Its ceiling-mounted fabric drum-style design brings a touch of elegance, making it especially suited for multifamily residences and senior care facilities. Every detail, from the soft illumination to the high-quality fabric, is crafted with care, ensuring that spaces exude warmth and sophistication. With availability in a diverse range of sizes, it caters to bespoke requirements, allowing customers to choose the perfect fit for their space. For those desiring a blend of classic design with modern illumination, Silhouette is the quintessential choice.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 2100 Source Lumens
Max 8075 Source Lumens

Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits


Certifications

- Location Listing:** Damp Location Rated for Ceiling Mounting
- Other:** Buy America Compliant (Not EB/BB)

Construction


Mounting Pan: stamped steel with Hi-Reflectance white Powder Coat Finish. **Fabric:** wipeable decorative vinyl with embedded fabric. **Diffuser:** Luminous white acrylic diffuser. **Mounting:** Ceiling Mount Only; Mounts Directly to 4-inch Octangle junction box.

Dimensions

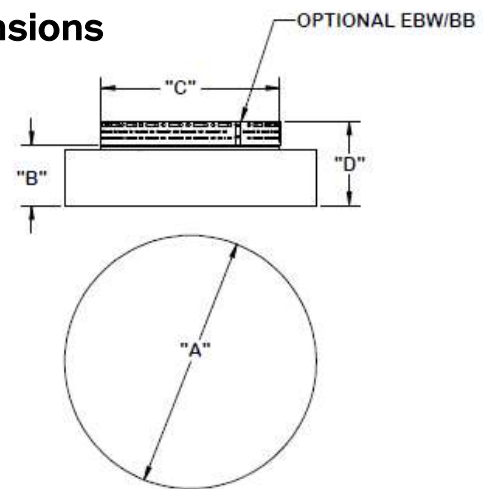

SILHOUETTE	"A"	"B"	"C"	"D"
SHR512	12 1/4"	4 5/8"	10"	1 1/4"
SHR115	15"	4 5/8"	12 3/4"	6 3/4"
SHR119	19"	5 1/4"	17"	7 1/2"
SHR124	24"	5 1/4"	17"	7 1/2"
SHR130	30"	8 5/16"	22"	10 1/4"

Trim

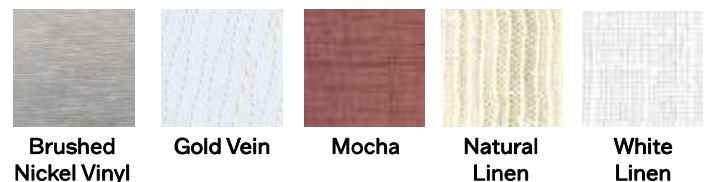

Catalog String

Fixture Core

SHRS

1

2

3

4

UNIV

5

Aesthetics & Options

6

7

8


Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
12 - SHRS12 Small	Not Applicable	L13.5 (12, 15, 19, 24, 30)	ZE - 0-10V	UNIV - (120V-277V)
15 - SHRM15 Medium		L20.5 (12, 15, 19, 24, 30)		
19 - SHRL19 Large		L21.0 (12, 15, 19, 24, 30)		
24 - SHRL24 Large		L28.5 (19, 24, 30)		
30 - SHRL30 Large		L30.0 (19, 24, 30)		
		L37.5 (19, 24, 30)		
		L50.0 (30 Only)		

6 — Finish	7 — CCT	8 — Options	
GVN - Gold Vein	30K - 3000K	BB - Back Box	SPD - Surge Protection Device
MOC - Mocha	35K - 3500K	F - Fused	STC12-WH - 12" Stem and Canopy Kit
NLN - Natural Linen	40K - 4000K	EB/BB - Back Box Integral EM Battery (Not Available in L50.0)	STC24-WH - 24" Stem and Canopy Kit
WLN - White Linen			STC36-WH - 36" Stem and Canopy Kit
BNV - Brushed Nickel (<i>Downlight Only</i>)			

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT	Size
L13.5	2100	155	3000K	12, 15, 19, 24, 30
L20.5	3100	151		12, 15, 19, 24, 30
L21.0	3100	151		12, 15, 19, 24, 30
L28.5	4100	144		19, 24, 30
L30.0	4522	134		19, 24, 30
L37.5	4845	135.5		19, 24, 30
L50.0	8075	161.5		30

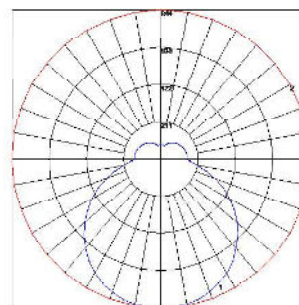

Polar Graph Details:

IES File Name: SHRL-L37.5-ZE1100-GVS-30K.IES

Maximum Candela = 844 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)