

Silhouette

Architectural Indoor



A harmonious blend of style and functionality, Silhouette stands out as the epitome of decorative lighting. Its ceiling-mounted fabric drum-style design brings a touch of elegance, making it especially suited for multifamily residences and senior care facilities. Every detail, from the soft illumination to the high-quality fabric, is crafted with care, ensuring that spaces exude warmth and sophistication. With availability in a diverse range of sizes, it caters to bespoke requirements, allowing customers to choose the perfect fit for their space. For those desiring a blend of classic design with modern illumination, Silhouette is the quintessential choice.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 2100 Source Lumens
Max 8075 Source Lumens

Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits


Certifications

- Location Listing:** Damp Location Rated for Ceiling Mounting
- Other:** Buy America Compliant (Not EB/BB)

Construction


Mounting Pan: stamped steel with Hi-Reflectance white Powder Coat Finish. **Fabric:** wipeable decorative vinyl with embedded fabric. **Diffuser:** Luminous white acrylic diffuser. **Mounting:** Ceiling Mount Only; Mounts Directly to 4-inch Octangle junction box.

Dimensions

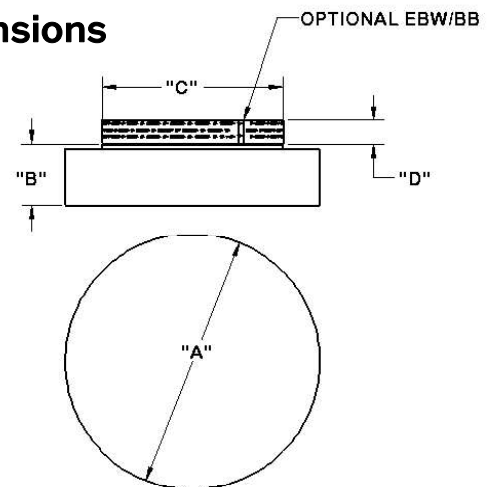

SILHOUETTE	"A"	"B"	"C"	"D"
SHRS12	12 1/4"	4 5/8"	N/A	N/A
SHRM15	15"	4 5/8"	12 3/4"	2 1/8"
SHRL19	19"	5 1/4"	17"	2 1/4"
SHRL24	24"	5 1/4"	17"	2 1/4"
SHRL30	30"	8 5/16"	22"	2"

Trim

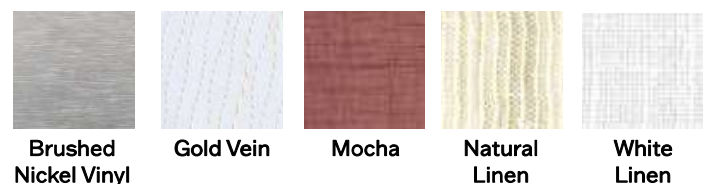

Catalog String

Fixture Core	SHRS				UNIV
	1	2	3	4	5
Aesthetics & Options					
	6	7	8		


Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
12 - SHRS12 Small	Not Applicable	L13.5 (12, 15, 19, 24, 30)	ZE - 0-10V	UNIV - (120V-277V)
15 - SHRM15 Medium		L17.0 (12, 15, 19, 24, 30)		
19 - SHRL19 Large		L20.5 (12, 15, 19, 24, 30)		
24 - SHRL24 Large		L28.5 (19, 24, 30)		
30 - SHRL30 Large		L37.5 (19, 24, 30)		
		L50.0 (30 Only)		

6 — Finish	7 — CCT	8 — Options	
GVN - Gold Vein	30K - 3000K	BB - Back Box	SPD - Surge Protection Device
MOC - Mocha	35K - 3500K	F - Fused	STC12-WH - 12" Stem and Canopy Kit
NLN - Natural Linen	40K - 4000K	EB/BB - Back Box Integral EM Battery	STC24-WH - 24" Stem and Canopy Kit
WLN - White Linen		(Not Available in L50.0)	STC36-WH - 36" Stem and Canopy Kit
BNV - Brushed Nickel (<i>Down light Only</i>)			

Performance

Wattage	Delivered Lumens (WLN)	Efficacy LM/W	CCT	Size
L13.5	1479	99	3000K	12
L17.0	1482	87		15
L20.5	1736	89		15
L37.5	2345	66		19
L50.0	5653	93		30



Polar Graph Details:

IES File Name: SHRL19-WLN-375-ZE-UNV-30K

Maximum Candela = 669 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)