

# Silhouette

Architectural Indoor



A harmonious blend of style and functionality, Silhouette stands out as the epitome of decorative lighting. Its ceiling-mounted fabric drum-style design brings a touch of elegance, making it especially suited for multifamily residences and senior care facilities. Every detail, from the soft illumination to the high-quality fabric, is crafted with care, ensuring that spaces exude warmth and sophistication. With availability in a diverse range of sizes, it caters to bespoke requirements, allowing customers to choose the perfect fit for their space. For those desiring a blend of classic design with modern illumination, Silhouette is the quintessential choice.

## LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 2100 Source Lumens  
Max 8075 Source Lumens

## Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits


## Certifications

- Location Listing:** Damp Location Rated for Ceiling Mounting
- Other:** Buy America Compliant (Not EB/BB)

## Construction

**Mounting Pan:** stamped steel with Hi-Reflectance white Powder Coat Finish. **Fabric:** wipeable decorative vinyl with embedded fabric. **Diffuser:** Luminous white acrylic diffuser. **Mounting:** Ceiling Mount Only; Mounts Directly to 4-inch Octangle junction box.

## Dimensions

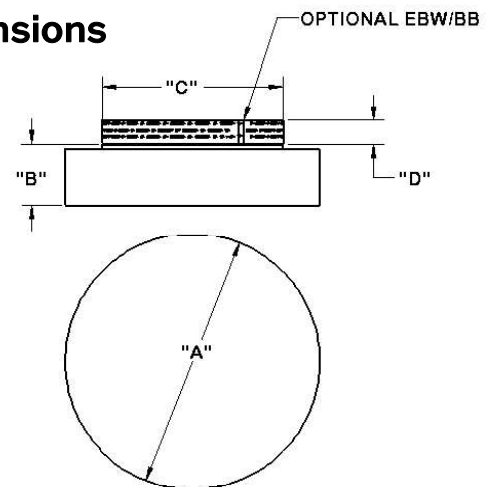

SILHOUETTE	"A"	"B"	"C"	"D"
SHRS12	12 1/4"	4 5/8"	N/A	N/A
SHRM15	15"	4 5/8"	12 3/4"	2 1/8"
SHRL19	19"	5 1/4"	17"	2 1/4"
SHRL24	24"	5 1/4"	17"	2 1/4"
SHRL30	30"	8 5/16"	22"	2"

## Trim



## Catalog String

Fixture Core

SHRS

1

2

3

4

UNV

5

Aesthetics & Options

6

7

8


## Product Specifications

1 — Product Code	2 — Shade	3 — Wattage	4 — Dimming	5 — Voltage
SHRS12 - 12"	GVN - Gold Vein	L13.5	ZE - 0-10V	UNV - (120V-277V)
SHRM15 - 15"	BTW - Brown Tweed	L17.0		
SHRL19 - 19"	NLN - Natural Linen	L20.5		
SHRL24 - 24"	WLN - White Linen	L28.5 (19, 24, 30)		
SHRL30 - 30"	BNV - Brushed Nickel (Down light Only)	L37.5 (19, 24, 30) L50.0 (30 Only)		

6 — Finish	7 — CCT	8 — Options	
WH - Gloss White (Additional Finishes Quoted)	30K - 3000K 35K - 3500K 40K - 4000K	BB - Back Box ( Not Available on SHRL30) F - Fused EB/BB - Back Box Integral EM Battery ( Not Available in SHRL30)	SPD - Surge Protection Device STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit

## Performance

Wattage	Delivered Lumens (WLN)	Efficacy LM/W	CCT	Size
L13.5	1579	123	3000K	12
L17.0	1482	91		15
L20.5	1736	89		15
L28.5	3246	112		24
L37.5	2345	66		19
L50.0	5653	93		30

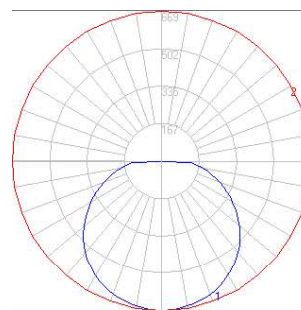

### Polar Graph Details:

**IES File Name:** SHRL19-WLN-375-ZE-UNV-30K

Maximum Candela = 669 Located At Horizontal Angle = 0, Vertical Angle = 0

# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)