

# Silhouette

Architectural Indoor



Traditions emerges as the top choice for residential and multifamily ceiling lighting. With its refined aesthetic, it effortlessly enhances living spaces, from cozy home interiors to expansive multifamily common areas. Its consistent and warm luminescence provides a homely ambiance, making every space feel welcoming and intimate. Traditions not only elevates the aesthetic of ceilings but also ensures that residential spaces are bathed in the perfect light, making it a favored pick for those who value both beauty and function.

## LED Engine

**Color Temp (CCT):** 3000K, 3500K, 4000K  
**CRI:** 80+ (consult factory for 90+)  
**Life Expectancy:** L70 rated at 50,000+ hours  
**Binning:** 3-step Macadam  
**Output:** Min 2100 Source Lumens  
Max 4845 Source Lumens


## Driver

**Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz  
**Dimming:** 0-10V and phase (trailing edge)  
**Efficiency:** Min 92%  
**Operating Temp:** -40°C / -40°F to 50°C / 122°F  
**FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

**Location Listing:** Damp Location Rated for Ceiling Mounting  
**Other:** ADA Compliant

## Dimensions

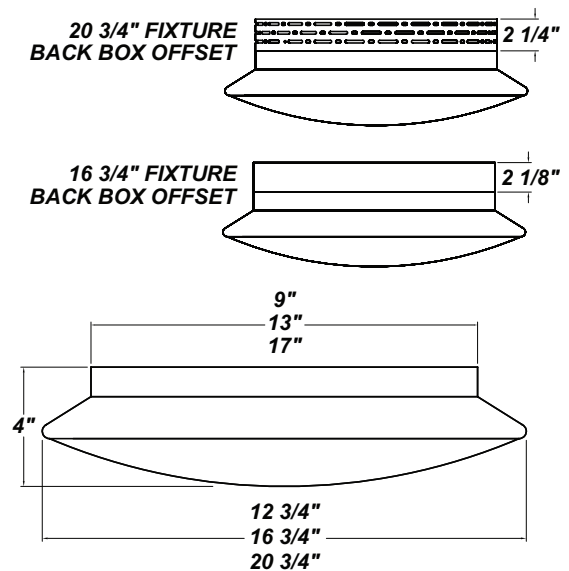

## Construction

**Mounting Pan:** stamped aluminum with hi-reflectant white finish. **Diffuser:** luminous white acrylic. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** Ceiling mount above a 4 inch junction box.

## Catalog String

Fixture Core

TN

1

2

3

ZE

4

UNIV

5

Aesthetics & Options

6

7


8

## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
<b>13</b> - TN13 <b>17</b> - TN17 <b>19</b> - TN19	<b>Not Applicable</b>	<b>L13.5</b> (13 & 17 only) <b>L17.0</b> (13 & 17 only) <b>L20.5</b> (13 & 17 only) <b>L37.5</b> (19 only)	<b>ZE</b> - 0-10V	<b>UNIV</b> - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
<b>FBK</b> - Fine Textured Black <b>FBZ</b> - Fine Textured Bronze <b>FWH</b> - Fine Textured White <b>FSV</b> - Fine Textured Silver	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>F</b> - Fused <b>STC12-WH</b> - 12" Stem and Canopy Kit <b>STC24-WH</b> - 24" Stem and Canopy Kit <b>STC36-WH</b> - 36" Stem and Canopy Kit <b>STC48-WH</b> - 48" Stem and Canopy Kit <b>MSI</b> - Integral Motion Sensor ( <i>Contact Factory</i> )		

## Performance

Wattage	Source Lumens	Efficacy LM/W	CCT	Size
L13.5	2100	155.5	3000K	13, 17
L17.0	2650	157		13, 18
L20.5	3100	151		13, 19
L37.5	4845	135.4		19



### Polar Graph Details:

**IES File Name:** TN-L21.0 ZE700 3000K, IES

Maximum Candela = 573 Located At Horizontal Angle = 0, Vertical Angle = 0

# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)