

Triton Mini

Architectural Outdoor



The Triton Mini is the quintessential solution for outdoor wall lighting needs. Tailored for a diverse range of applications, it shines exceptionally on commercial and retail building facades, strip malls, outdoor shopping centers, and multifamily units like apartments. Its robust and sleek design ensures consistent and vibrant illumination, bringing out the architectural elegance of wall-mounted commercial facades and corridors. Whether it's casting a soft glow on a bustling outdoor mall or highlighting the intricacies of a modern apartment complex, the Triton Mini is the go-to choice for businesses and architects aiming for both functionality and aesthetic appeal.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 1700 Source Lumens
Max 3300 Source Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** Phase (Leading or Trailing Edge)
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Wet Location Rated for Wall Mounting
- Other:** Buy America Compliant

Dimensions

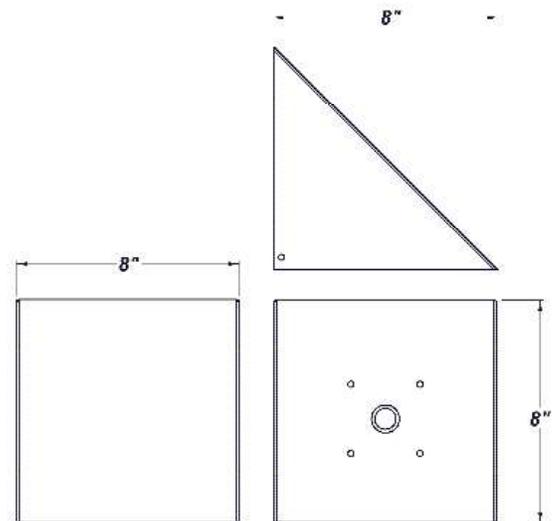

Construction

Housing: die-formed aluminum with frosted white acrylic diffuser. **Mounting Plate:** die-formed aluminum. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** stainless steel. **Mounting:** Wall-mounted over a 4-inch junction box.

Triton Mini

Architectural Outdoor



Catalog String

Fixture Core

TTM

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
TTM	Not Applicable	L12.5 (LT Only) L18.0 (LT and ZE) L25.0 (LT 120V Only and ZE)	LT - Leading/Trailing Edge ZE - 0-10V	UNIV - (120V-277V) 120V - (L25.0 LT)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	EBCA - Title 20 Compliant Integral EM Battery F - Fused PCL - Photocell (specify voltage) SPD - Surge Protection Device TP - Tamper Resistant Screws		

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT
L12.5	1700	136	3000K
L18.0	2400	133	
L25.0	3300	132	



Polar Graph Details:

IES File Name: TTM L25.0 ZE700 120 277V SM 3000K.IES

Maximum Candela = 834 Located At Horizontal Angle = 0, Vertical Angle = 5

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)

BUG Rating: B2-U0-G0

