

TRITON MINI LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish,
- Aluminum Mount Pan & Reflector w/ Hi-Reflectance White Powder Coat Finish
- CSA Approved Wet Location For Wall Mounting -Down Light only
- Dark Sky Compliant
- LED Light Fixture
- Mounting Hardware Included
- Mounts Directly to Junction Box (Mounting Hardware Included)
- Semi-Opaque Polycarbonate Diffuser
- Surge Protector



LINE DRAWING

LINE DRAWING NOT TO SCALE

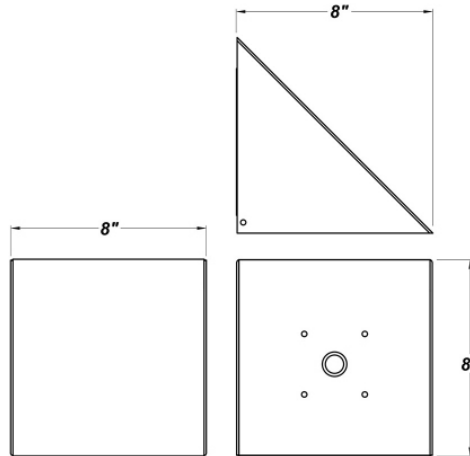

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

TRITON MINI LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TTM - Triton MINI LED	L12.5-LT350 - 12.5W LED Board @ 350mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge) L18.0-LT500 - 18.0W LED Board @ 500mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge)	120-277V (50 / 60Hz)	See Source/Wattage for Dimming Options
ORDER INFO			
TTM	L12.5-LT350	120-277V	

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze (Standard) TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EBCA4- Title 20 Compliant 4 Watt Integral Battery F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper Resistant Screws SPD - Surge Protection Device
ORDER INFO			
Not Applicable	AC	30K	EBCA4

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	40K SPECS			
TTM	L12.5	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1700 LED Source Lumens • 136 LED Source Lumens per Watt 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 1750 LED Source Lumens • 140 LED Source Lumens per Watt 			
	L18.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2400 LED Source Lumens • 133 LED Source Lumens per Watt 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 2472 LED Source Lumens • 137 LED Source Lumens per Watt 			

REPLACEMENT PART	PART NO	NOTES
Semi-Opaque Polycarbonate Diffuser	3409660	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

TRITON MINI LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
TTM - Triton MINI LED	L18.0-ZE500 - 18.0W LED Board @ 500mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V) L25.0-LT700 - 25.0W LED Board @ 700mA ELV Low Voltage 2-Wire Dimming Electronic Driver (Leading or Trailing Edge) L25.0-ZE700 - 25.0W LED Board @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120-277V (50 / 60Hz)	See Source/Wattage for Dimming Options
ORDER INFO			
TTM	L18.0-ZE500	120-277V	

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black	BZ - Textured Bronze (Standard) TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp
ORDER INFO			EBCA4- Title 20 Compliant 4 Watt Integral Battery F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper Resistant Screws SPD - Surge Protection Device
Not Applicable	AC	30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	40K SPECS			
TTM	L18.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1700 LED Source Lumens • 136LED Source Lumens per Watt 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 1750 LED Source Lumens • 140 LED Source Lumens per Watt 			
	L25.0 IES Files for the L25.0 available	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 3300 LED Source Lumens • 132 LED Source Lumens per Watt 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 3400 LED Source Lumens • 136 LED Source Lumens per Watt 			

REPLACEMENT PART	PART NO	NOTES
Semi-Opaque Polycarbonate Diffuser	3409660	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.