

Turnberry

Architectural Indoor



Designed with precision for the unique requirements of commercial and retail corridors, the Turnberry is both a statement of elegance and a workhorse of illumination. Its distinguished design casts an even, powerful light, ensuring that every inch of hallways and passages are well-lit, enhancing safety and visual appeal. The meticulous engineering behind the Turnberry ensures that products on display and architectural nuances are highlighted with brilliance. For establishments keen on creating a welcoming and efficiently lit environment, the Turnberry emerges as the premier choice.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 3795 Source Lumens
Max 7590 Source Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Damp Location Rated for Wall or Ceiling Mounting
- Other:** ADA Compliant
Buy America Compliant

Dimensions

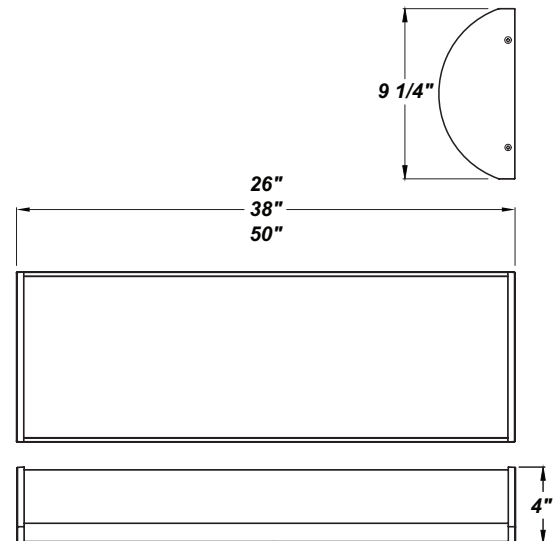

Construction

Mounting Plate: Die-formed aluminum. **End Caps:** Die-cast aluminum with recessed screws. **Diffuser:** impact-resistant white luminous acrylic diffuser. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** stainless steel. **Mounting:** wall-mounted over a 4-inch junction box.



Catalog String

Fixture Core

TRN

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
24 - TRN24 36 - TRN36 48 - TRN48	Not Applicable	L24.0 (24" only) L34.0 (24" only) L31.0 (36" only) L42.0 (36" only) L46.0 (48" only)	ZE - 0-10V	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	EB - Integral EM Battery F - Fused OEL - Single End Window TEL - Twin End Windows (Both Ends)	TP - Tamper Resistant Screws MSI - Integral Motion Sensor NLT - LED Night Light MSE - External Motion Sensor	

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT	Size
L24.0	3795	158.1	3000K	24
L34.0	5421	159.4		24
L31.0	3258	114.7		36
L42.0	6956	165.6		36
L46.0	7590	165		48



Polar Graph Details:

IES File Name: TRN36-L42 - 120-277V -ZE1400-WAL-TW-3000K.IES

Maximum Candela = 834 Located At Horizontal Angle = 0, Vertical Angle = 95

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (95) (Through Max. Cd.)