

# Viceroy Wet

Architectural Outdoor



The Viceroy Wet encapsulates the convergence of cutting-edge design and superior lighting technology. This streamlined wall-mounted fixture gracefully fits into both modern and classic spaces. With its compact and stylish form, it's especially suited for commercial facades and luxury residential interiors. Architects aiming for a blend of design sophistication and optimal illumination will find the Viceroy Wet to be an unparalleled choice.

## LED Engine

**Color Temp (CCT):** 3000K, 3500K, 4000K  
**CRI:** 80+ (consult factory for 90+)  
**Life Expectancy:** L70 rated at 50,000+ hours  
**Binning:** 3-step Macadam  
**Output:** Min 2022 Delivered Lumens  
Max 4154 Delivered Lumens


## Driver

**Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz  
**Dimming:** 0-10V and Phase (Leading or Trailing edge)  
**Efficiency:** Min 92%  
**Operating Temp:** -40°C / -40°F to 50°C / 122°F  
**FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

**Location Listing:** Wet Location Rated for Wall Mounting  
**Other:** ADA Compliant  
Buy America Compliant

## Dimensions

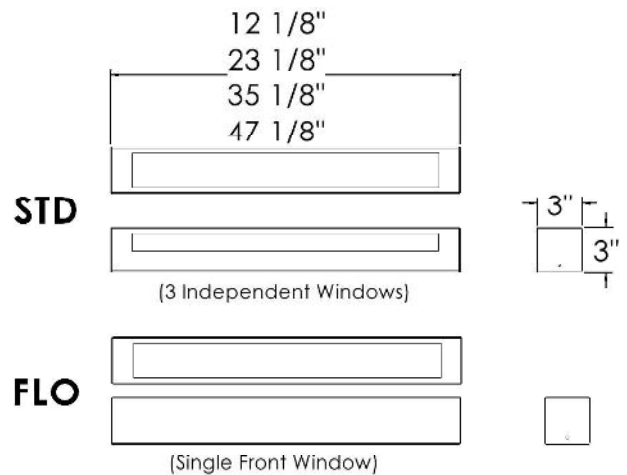

## Construction

**Mounting Plate:** Die-formed aluminum. **Housing:** die-formed aluminum with white acrylic diffuser. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** Wall or ceiling above a 4 inch junction box.



## Catalog String

Fixture Core

VCYW

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
VCYW12 - 12 -1/8"	STD (blank)  FLO	L6.0 (12"/LT only)	ZE - 0-10V  LT - Leading/Trailing Edge	UNIV - (120V-277V)
VCYW24 - 23 1/8"		L12.0 (12"/LT/ZE)		
VCYW36 - 35 1/8"		L25.0 (24"/ZE only)		
VCYW48 - 47 1/8"		L30.0 (36"/ZE only) L36.0 (48"/ZE only) L41.2.0 (48"/ZE only)		
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black	30K - 3000K	EB - Integral EM Battery (48"/L36.0 only)		
FBZ - Fine Textured Bronze	35K - 3500K			
FWH - Fine Textured White	40K - 4000K			
FSV - Fine Textured Silver				

## Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT	Size
L25.0	2022	81	3000K	24
L36.0	4154	115.3		48

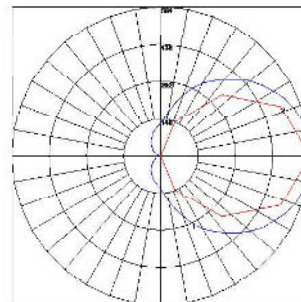

### Polar Graph Details:

**IES File Name:** VCYW24-L20\_6-ZE600-SM-3000K.IES

Maximum Candela = 584 Located At Horizontal Angle = 0, Vertical Angle = 95

# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (95) (Through Max. Cd.)

Bug Rating: B0-U4-G2