

# Viceroy Wet

Architectural Outdoor



The Viceroy Wet encapsulates the convergence of cutting-edge design and superior lighting technology. This streamlined wall-mounted fixture gracefully fits into both modern and classic spaces. With its compact and stylish form, it's especially suited for commercial facades and luxury residential interiors. Architects aiming for a blend of design sophistication and optimal illumination will find the Viceroy Wet to be an unparalleled choice.

## LED Engine

**Color Temp (CCT):** 3000K, 3500K, 4000K  
**CRI:** 80+ (consult factory for 90+)  
**Life Expectancy:** L70 rated at 50,000+ hours  
**Binning:** 3-step Macadam  
**Output:** Min 2022 Delivered Lumens  
Max 4154 Delivered Lumens


## Driver

**Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz  
**Dimming:** 0-10V and Phase (Leading or Trailing edge)  
**Efficiency:** Min 92%  
**Operating Temp:** -40°C / -40°F to 50°C / 122°F  
**FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

**Location Listing:** Wet Location Rated for Wall Mounting  
**Other:** ADA Compliant  
Buy America Compliant

## Dimensions

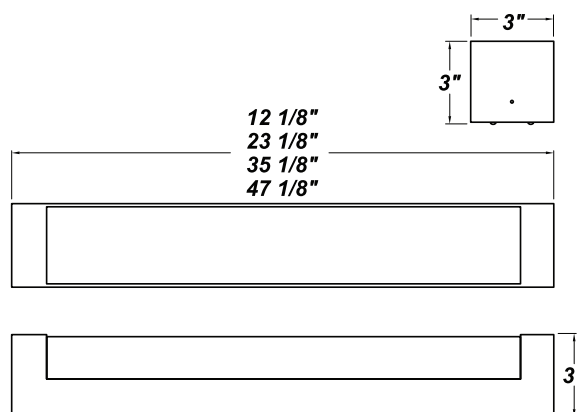

## Construction

**Mounting Plate:** Die-formed aluminium. **Housing:** die-formed aluminium with white acrylic diffuser. **Finish:** high quality polyester powder coating, various finishes. **Mounting:** Wall or ceiling above a 4 inch junction box.



## Catalog String

Fixture Core

VCYW

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
<b>12</b> - VCYW12 <b>24</b> - VCYW24 <b>36</b> - VCYW36 <b>48</b> - VCYW48	<b>STD</b> ( <i>blank</i> ) <b>FLO</b>	<b>L6.0</b> (12"/LT only) <b>L12.0</b> (12"/LT only) <b>L13.0</b> (12"/ZE only) <b>L25.0</b> (26"/ZE only) <b>L30.0</b> (36"/ZE only) <b>L36.0</b> (48"/ZE only) <b>L41.2.0</b> (48"/ZE only)	<b>ZE</b> - 0-10V <b>LT</b> - Leading/Trailing Edge	<b>UNIV</b> - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
<b>FBK</b> - Fine Textured Black <b>FBZ</b> - Fine Textured Bronze <b>FWH</b> - Fine Textured White <b>FSV</b> - Fine Textured Silver	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>EB</b> - Integral EM Battery (48"/L36.0 only)		

## Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT	Size
L25.0	2022	81	3000K	24
L36.0	4154	115.3		48

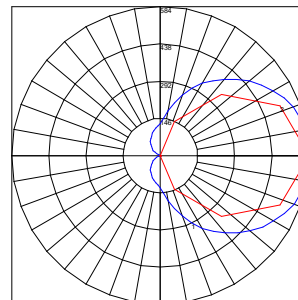

### Polar Graph Details:

**IES File Name:** VCYW24-L20\_6-ZE600-SM-3000K.IES

Maximum Candela = 584 Located At Horizontal Angle = 0, Vertical Angle = 95

# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (95) (Through Max. Cd.)

Bug Rating: B0-U4-G2