

Zenith Large

Architectural Outdoor



Merging avant-garde design with top-tier lighting technology, the Zenith Large stands as a testament to sophistication and efficiency. With its polished ceiling-mounted silhouette, it's a fitting choice for both sleek modern environments and classic elegant spaces. Ideal for illuminating commercial centers, luxurious hotel lobbies, or refined residential interiors, the Zenith Large is the choice for architects and designers aiming for unmatched elegance and functionality.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 3215 Source Lumens
Max 6152 Source Lumens


Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V and phase (trailing edge)
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

Certifications

- Location Listing:** Wet Location Rated for Wall Mounting
- Other:** ADA Compliant
Buy America Compliant

Dimensions

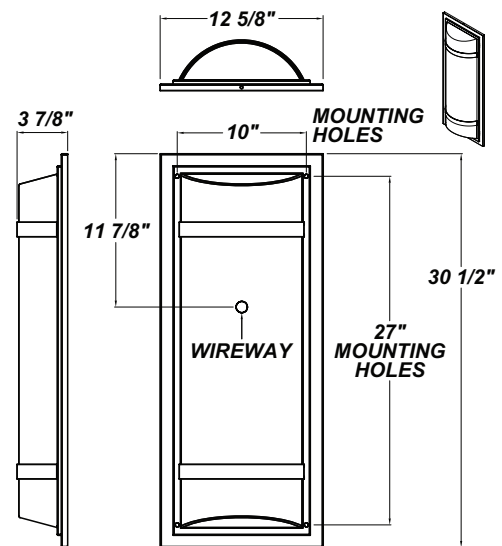

Construction

Mounting Plate: die-formed aluminum with high reflectance white finish. **Trim:** die-formed aluminum with impact-resistant luminous white acrylic diffuser. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** Stainless steel. **Mounting:** Wall-mounted over a 4 inch junction box.



Zenith Large

Architectural Outdoor



Catalog String

Fixture Core

ZENL

1

2

3

4

UNIV

5

Aesthetics & Options

6

7

8


Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
ZENL	STD (blank) TBS	L32.2 L48.3 L64.4	ZE - 0-10V	UNIV - (120V-277V)

6 — Finish	7 — CCT	8 — Options
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	EB - Integral EM Battery (specify voltage) TP - Tamper Resistant Screws F - Fused MSI - Integral Motion Sensor SPD - Surge Protection Device

Performance

Wattage	Source Lumens	Efficacy LM/W	CCT
L32.2	3215	99.8	3000K
L48.3	4474	92.6	
L64.4	6152	95.5	



Polar Graph Details:

IES File Name: ZENITH LG LED 64.4 4000K.IES

Maximum Candela = 1176 Located At Horizontal Angle = 0, Vertical Angle = 90

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (90) (Through Max. Cd.)

BUG Rating: B0-U5-G3

