

ZENITH LG TBS LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- 0-10V Dimming Driver
- ADA Compliant
- Aluminum Mounting Pan w/ High Reflectance White Powder Coat Finish
- Aluminum Trim w/ Matte Silver Powder Coat Finish
- CSA Listed Damp Location For Ceiling Mount
- CSA Listed Wet Location For Wall Mount
- IES Files Available
- Integral LED EM Driver Available (66.4W Maximum)
- LED Light Fixture
- Mounts Direct to 4" Junction Box w/ 4 Wall Anchors (By Others) (Not Included)
- Surge Protector
- Vandal Resistant
- White 75% DR Acrylic Lens

LINE DRAWING

LINE DRAWING NOT TO SCALE

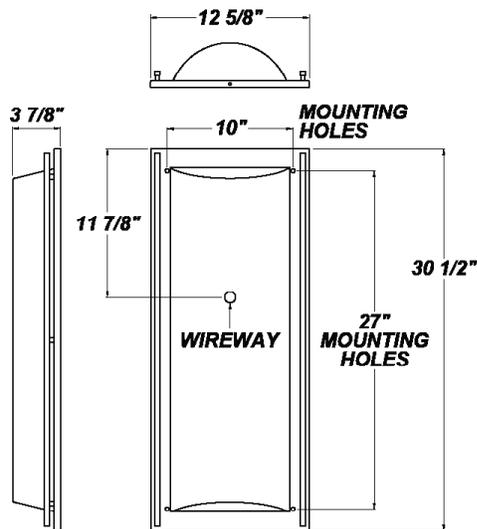


FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver




Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ZENITH LG TBS LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ZENL - Zenith LG	L32.2-ZE700 - 32.2W @ 700mA 0-10V Dimming Driver L48.3-ZE1200 - 48.3W @ 1200mA 0-10V Dimming Driver L64.4-ZE1600 - 64.4W @ 1600mA 0-10V Dimming Driver	120-277V	Not Applicable
ORDER INFO			
ZENL	L32.2-ZE700	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
TBS	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp.	F - Fused EB - Integral Emergency Driver (Please Specify Voltage When Ordering) MSI - Steinel HFLUM2-WR Internal Motion Sensor (120V / 277V Only) TP - Tamper Resistant Screws SPD - Surge Protection Device
ORDER INFO			
TBS	AC	30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
ZENL	L32.2	<ul style="list-style-type: none"> • 30K - 3000K Color Temp. • 3215 LED Source Lumens • 99.8 LED Source Lumens Per Watt 			
	L48.3	<ul style="list-style-type: none"> • 30K - 3000K Color Temp. • 4474 LED Source Lumens • 92.6 LED Source Lumens Per Watt 			
	L64.4	<ul style="list-style-type: none"> • 30K - 3000K Color Temp. • 6152 LED Source Lumens • 95.5 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3051260	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.