

ZENITH SM LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- ADA Compliant
- Aluminum Mounting Pan w/ High Reflectance White Powder Coat Finish
- Aluminum Trim w/ Matte Silver Powder Coat Finish
- CSA Listed Damp Location For Ceiling Mount
- CSA Listed Wet Location For Wall Mount
- Dimmable to <5%
- IES Files Available
- LED Light Fixture
- Mounts Direct to 4" Junction Box w/ 4 Wall Anchors (By Others) (Not Included)
- Surge Protector
- UL Class 2 ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- Vandal Resistant
- White 75% DR Acrylic Lens

LINE DRAWING

LINE DRAWING NOT TO SCALE

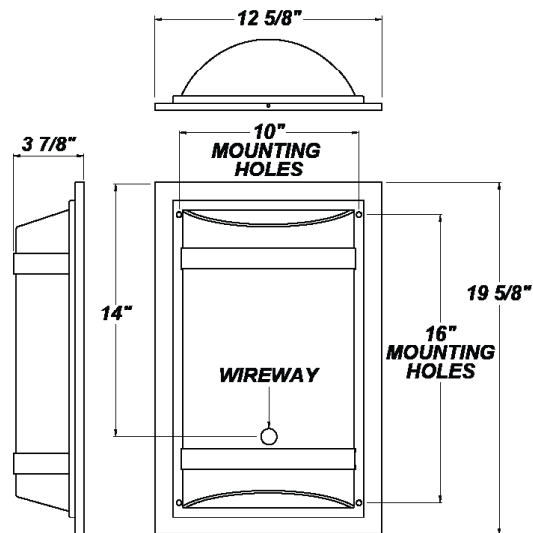

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ZENITH SM LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ZENS - Zenith SM	L16.2-TE500 - 16.2W @ 500mA ELV 2-Wire Dimmable Driver L24.3-TE875 - 24.3W @ 875mA ELV 2-Wire Dimmable Driver	120-277V	Not Applicable
ORDER INFO			
ZENS	L16.2-TE500	120-277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp.	F - Fused MSI - Steinel HFLUM2-WR Internal Motion Sensor (120V / 277V Only) TP - Tamper Resistant Screws SPD - Surge Protection Device
ORDER INFO			
Not Applicable	AC	40K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
ZENS	L24.3	<ul style="list-style-type: none"> • 30K - 3000K Color Temp. • 3280 LED Source Lumens • 121 LED Source Lumens Per Watt 			
	L16.2	<ul style="list-style-type: none"> • 30K - 3000K Color Temp. • 1944 LED Source Lumens • 121 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White 75% DR Acrylic Lens	3048960	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.