

ALLEGRO W DGS LED

Architectural Outdoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |


FEATURES

- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum End Caps and Trim Bars w/ Textured Black Polyester Powder Coat Finish
- Aluminum Mount Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Wrap-Around Diffuser
- Luminous White Acrylic Top and Bottom Lens Panels
- Mounts Over 4" Junction Box w/ Easy-hang Wall Mounting Plate (Included)
- Operating Temperature Range for EB (0° - 50°C)
- CSA Approved For Wet Location For Vertical Mounting
- LED Light Fixture
- Mounting Hardware Included



LINE DRAWING

LINE DRAWING NOT TO SCALE

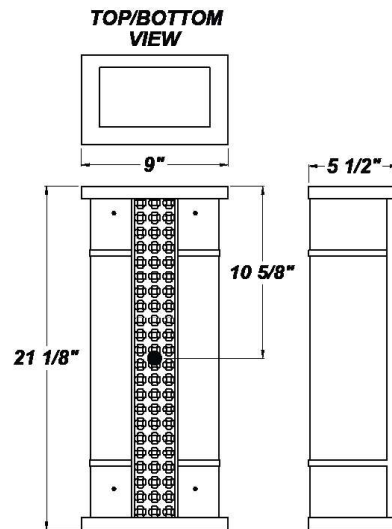

FINISHES

Antique Copper



Antique Silver



Bronze Mist




Matte Silver




Sand




Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ALLEGRO W DGS LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-------------------------|---|---|-----------------------|
| ALLW - Allegro W | L19.0-ZE700 - 19W @ 700mA 0-10V Dimming Driver L24.0-ZE875 - 24W @ 875mA 0-10V Dimming Driver L31.0-ZE1150 - 31W @ 1150mA 0-10V Dimming Driver | 120V 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| ALLW | L19.0-ZE700 | 120V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------|--|---|---|
| DGS | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | F - Fused TP - Tamper Resistant Screws SPD - Surge Protection Device |
| ORDER INFO | | | |
| DGS | AC | 30K | F |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | |
|-------------|--------|--|--|--|--|
| ALLW | L19.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 2489 LED Source Lumens 113 LED Source Lumens Per Watt | | | |
| | L24.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 3180 LED Source Lumens 106 LED Source Lumens Per Watt | | | |
| | L31.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 4125 LED Source Lumens 106 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|-----------------------------|---------|--|
| White Acrylic Lens Assembly | 9801460 | Operating Temperature Range for EB (0° - 50°C) |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SEND CUT-SHEET

ALLEGRO W DGS LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------|---|---|----------------|
| ALLW - Allegro W | L38.0-ZE1400 - 38W @ 1400mA 0-10V Dimming Driver L38.0-TE1400 - 38W @ 1400mA ELV Dimming Driver L36.0-ZE1100 - 36W @ 1100mA 0-10V Dimming Driver | 120V 277V (50 / 60Hz) | Not Applicable |
| ORDER INFO | | | |
| ALLW | L38.0-ZE1400 | 120V | Not Applicable |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|------------|--|---|---|
| DGS | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp | EB - Emergency Battery (L36.0 Only) F - Fused TP - Tamper Resistant Screws SPD - Surge Protection Device |
| ORDER INFO | | | |
| DGS | AC | 30K | EB |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | |
|------|--------|--|--|--|--|
| ALLW | L36.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 5465 LED Source Lumens 151.8 LED Source Lumens per Watt | | | |
| | L38.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 5208 LED Source Lumens 109 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|-----------------------------|---------|--|
| White Acrylic Lens Assembly | 9801460 | Operating Temperature Range for EB (0° - 50°C) |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SEND CUT-SHEET