

ALLERO LED 25"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- 0-10V and Trailing Edge (ELV) Dimming Compatible Options Available
- 50% Impact Resistant Frosted DR Acrylic Diffuser Formulated For Use With LEDs
- ADA Compliant
- Constant Current, Dimmable 0-10V, 10%, 25%, And 50% Step Dimmable
- CSA Listed Damp Location For Wall or Ceiling Mount
- IES Files Available (Tested w/ Standard White Acrylic Lens Assembly)
- LED Light Fixture
- Mounts Directly to Wall or Ceiling w/ Four Wall Anchors (Not Included)
- Solid Top, Which Reduces Uplight
- Steel Housing and End Caps w/ Matte Silver Powder Coat Finish
- Steel Reflector Plate w/ Hi-Reflectance White Powder Coat Finish
- Vandal Resistant

LINE DRAWING

LINE DRAWING NOT TO SCALE

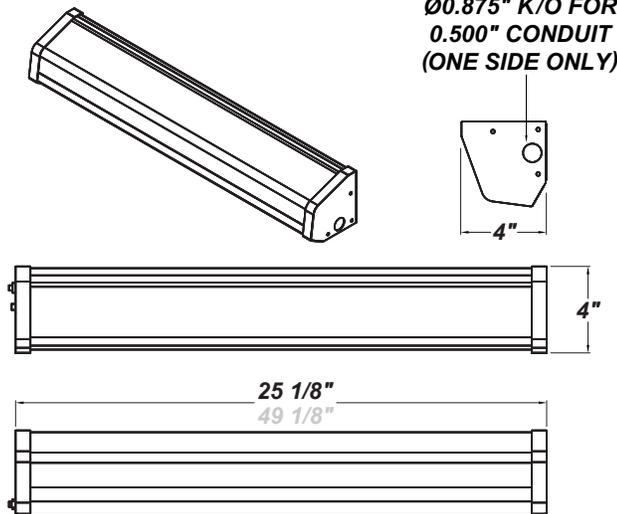

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.



ALLERO LED 25"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
AL024 - Allero 25"	L20.1-ZE550 - 28W @ 550mA Constant Current Electronic Driver (Dimmable 0-10V) L20.1-TE550 - 22W @ 550mA Constant Current ELV Dimming Electronic Driver	120V 277V	Not Applicable
ORDER INFO			
AL024 Example ^	L20.1-ZE550	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	F - Fused FAL - Frosted Acrylic Lens TP - Tamper Resistant Screws WAL - Frosted & White Acrylic Lens Assembly (Standard)
ORDER INFO			
Not Applicable Example ^	AC	27K	F

PROD	SOURCE	30K SPECS				
ALO 25"	L20.1	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2982 LED Source Lumens 106.5 LED Source Lumens Per Watt 1797 Delivered LED Lumens 64.2 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
Frosted 2' Acrylic Diffuser	3029662	
White 2' Acrylic Lens Assembly	38112	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.