

ALLERO MSE LED 25"

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- ADA Compliant
- Constant Current
- CSA Listed Damp Location For Wall or Ceiling Mount
- Dimmable 0-10V, 10-90% Bi-Level Step Dimming - 10% increments
- [External Motion Sensor](#)
- High Impact Frosted Acrylic Diffuser
- IES Files Available (Tested with Standard White Acrylic Lens Assembly)
- LED Light Fixture
- Optional Mounting of Luminaire - Directing The LEDs 20 Degrees From Horizontal or 70 Degrees From Horizontal (FS-505 Recommended in Standard Mounting Position Only)
- Mounts Directly to Wall or Ceiling with Four Wall Anchors (Not Included)
- Steel Housing & End Caps with Matte Silver Powder Coat Finish & light Reducing Solid Top
- Steel Reflector Plate with Hi-Reflectance White Powder Coat Finish



LINE DRAWING

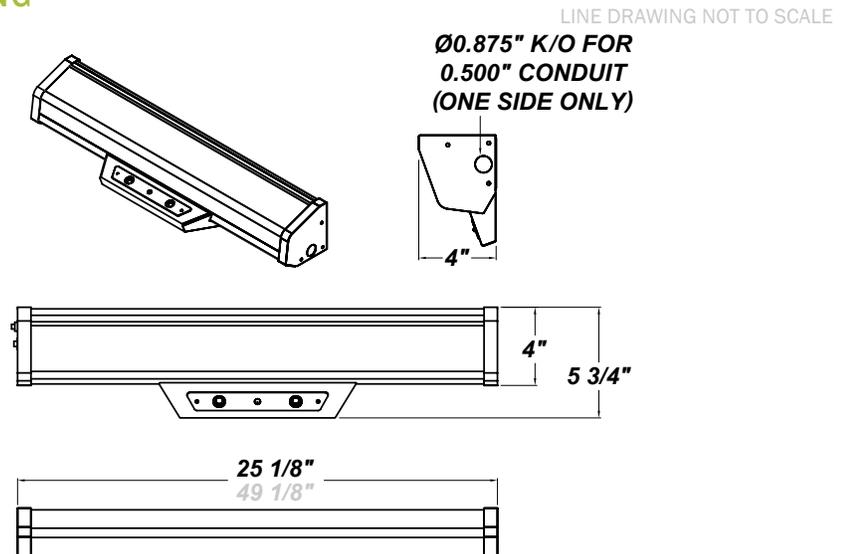


FINISHES

Antique Copper




Antique Silver



Bronze Mist



Matte Silver



Sand




Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ALLERO MSE LED 25"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING BALLAST
AL024 - Allero 25"	L20.1-ZE550 - 28W @ 550mA Constant Current Electronic Driver (Dimmable 0-10V) L20.1-TE550 - 22W @ 550mA Constant Current ELV Dimming Electronic Driver	120V 277V 347V (50 / 60Hz)	SDxx - Bi-Level Step Dimming from 10-90% in increments of 10% (replace xx in ordering code with requested dimming percentage)
ORDER INFO			
AL024	L20.1-ZE550	120V	SD50

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
MSE - External Motion Sensor (Wattstopper FS-505)	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	51K - 5100K Color Temp. 40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp.	FAL - Frosted Acrylic Lens WAL - White Acrylic Lens Assembly (Standard) EB - BSL310LP Emergency Driver (120V - 277V Only) TP - Tamper Resistant Screws F - Fused
ORDER INFO			
MSE	AC	51K	FAL-WAL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE				

REPLACEMENT PART	PART NO	NOTES
Frosted 2' Acrylic Diffuser	3029662	*Don't see the configuration you are looking for? Call us today at (513) 858-6004
White 2' Acrylic Lens Assembly	38112	



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.