

# ASCOTT BFP LED 18"

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES

- 2 Side Conduit Entry Points
- ETL/cETL Listed Wet Location for Wall or Ceiling
- Energy Star
- Mounts Directly to Surface w/ Two Wall Anchors
- Injection Molded Polycarbonate Housing w/ White Finish
- LED Light Fixture
- Luminous White Polycarbonate Diffuser
- IP65 Rated
- IK08 Rating
- Optional Built-in Emergency Battery Backup
- Optional Bi-Level Light With High Frequency Motion Sensor
- L70 >35,000 hrs
- Operating Temperature = -20 Degrees C to 40 Degrees C

## LINE DRAWING

LINE DRAWING NOT TO SCALE

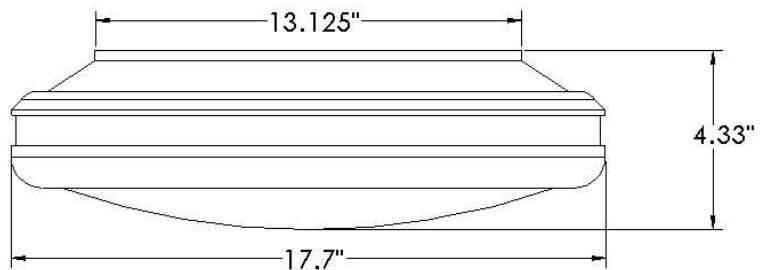

## FINISHES

White



# ASCOTT BFP LED 18"

Architectural Outdoor



Fixture Core

PROJECT:

TYPE:

PO#:

QTY:

COMMENTS:

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
AT18 - Ascott 18"	Not Applicable	L34.0-34W	Not Applicable
ORDER INFO			
AT18	L34.0-1050	120-277V	Not Applicable

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV - 120V - 277V	WH - White	40K - 4000K Color Temperature	EM - EMERGENCY BATTERY BACKUP BI - BI-LEVEL LIGHT AND MOTION SENSOR
ORDER INFO			
Not Applicable	WH	40K	Not Applicable

PROD	SOURCE	40K SPECS				
AT18	L34.0	<ul style="list-style-type: none"><li>Color Temp</li><li>3271LED Delivered Lumens</li><li>103 LED Delivered Lumens Per Watt</li></ul>				

REPLACEMENT PART	PART NO	NOTES



TERONLIGHTING.COM  
33 DONALD DR, FAIRFIELD, OH 45014  
P: 513.858.6004 F: 513.858.6038  
E: SALES@TERONLIGHT.COM

REV 10142024

SEND CUT-SHEET

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.