BIRDIE POLY BFP RD GRL LED

Architectural Outdoor









FEATURES


• White or Black Polycarbonate Housing and Fascia

PROJECT: TYPE: PO#:

COMMENTS:

- Aluminum Back Pan w/ Powder Coat Finish
- Frosted White Polycarbonate Lens
- Ambient Operating Temperature -40° C (-40° F) to 40° C (105° F)
- Constant Current at 700 Milliamps
- UL Class 2 Driver Power Factor >.90
- Thermal Protected LED Array
- Wall or Ceiling Mount
- LED Light Fixture
- Mounting Hardware Included
- UL Listed Wet Location
- Vandal Resistant

LINE DRAWING

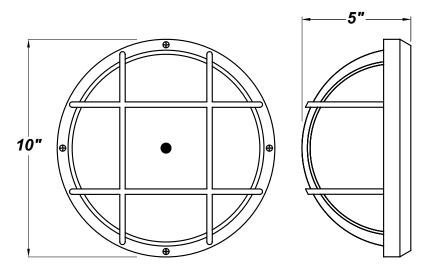

FINISHES

For RAL Colors & Custom Match -Contact Teron Lighting Inc.



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 1

QTY:

BIRDIE POLY BFP RD GRL LED

Architectural Outdoor

👔 c 🕒 us 🔦

PROJECT:	
TYPE:	
PO#·	

QTY:

COMMENTS:

PO#:

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER	
BER - Birdie Poly BFP RD LED	L18.0 - 22W @ 700 Constant Current Driver	120V 277V (50 / 60Hz)	Not Applicable	
ORDER INFO				
BER	L18.0	120V	Not Applicable	

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

	FINISH	COLOR TEMP	OPTIONS
	BK - Black Polycarbonate WH - White Polycarbonate (Standard)	40K - 4000K Color Temp	Not Applicable
	BK	40K	Not Applicable
may not represent a	manufacturable product)		
SOURCE	40K SPECS		
L18.0	 40K - 4000K Color Temp 1824 LED Source Lumens 82 LED Source Lumens Per Watt 		
		BK - Black Polycarbonate WH - White Polycarbonate (Standard) BK may not represent a manufacturable product) SOURCE 40K SPECS L18.0 • 40K - 4000K Color Temp • 1824 LED Source Lumens • 82 LED Source	BK - Black Polycarbonate WH - White Polycarbonate (Standard) 40K - 4000K Color Temp BK Polycarbonate (Standard) BK 40K BK 40K May not represent a manufacturable product) 40K SOURCE 40K SPECS L18.0 • 40K - 4000K Color Temp • 1824 LED Source Lumens • 82 LED Source

REPLACEMENT PART	PART NO	NOTES
White Polycarbonate Lens	3400760	
Birdie Poly Round White GRL Fascia	5510602	Dep't age the configuration you are leading for?
Birdie Poly Round Black GRL Fascia	5510601	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.