

# CAPRI LED CPT 24"


Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mounting
- L22.0 and L33.0 are Dimmable at 120V Only
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Steel Housing w/ Matte Silver Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish



## LINE DRAWING

LINE DRAWING NOT TO SCALE

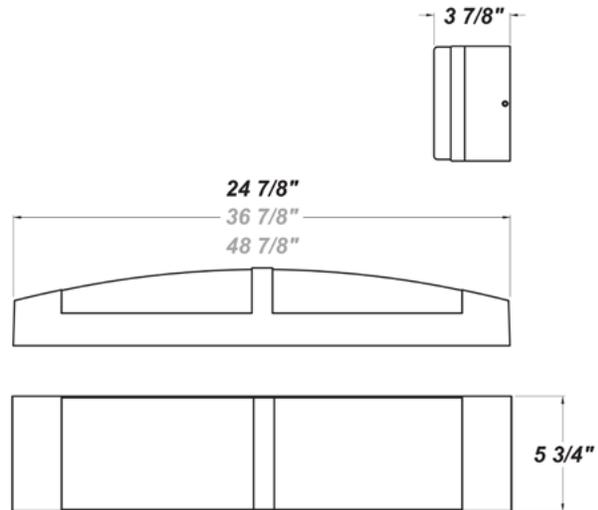


## FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# CAPRI LED CPT 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CPR24 - Capri 24"	L22.0-LT700 - 22W @ 700mA ELV Dimming Driver (Dimmable at 120V Only) L33.0-LT1000 - 33W @ 1000mA ELV Dimming Driver (Dimmable at 120V Only) L33.0-ZE1000 - 33W @ 1000mA 0-10V Dimming Driver L36.0-ZE1100 - 36W @ 1100mA 0-10V Dimming Driver	120V 277V	Not Applicable
ORDER INFO			
CPR24 Example ^	L22.0-LT700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
CPT	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused TP - Tamper Resistant Screws
ORDER INFO			
CPT Example ^	AC	30K	F

PROD	SOURCE	30K SPECS				
CPR 24"	L22.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>3479 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				
	L33.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>4970 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				
	L36.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>5467 LED Source Lumens</li> <li>145 LED Source Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
White 2' Acrylic Diffuser	3039860	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.