

CITADEL W LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- ADA Compliant
- Aluminum Fascia w/ Textured Black Polyester Powder Coat Finish
- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- 4 Frosted F(1) Rated Acrylic Side Lens Panels
- LED Light Fixture
- Mounts Directly to 4" Junction Box (By Others) J-Box Centered in Fixture
- Mounting Hardware Included
- Wet Location

LINE DRAWING

LINE DRAWING NOT TO SCALE

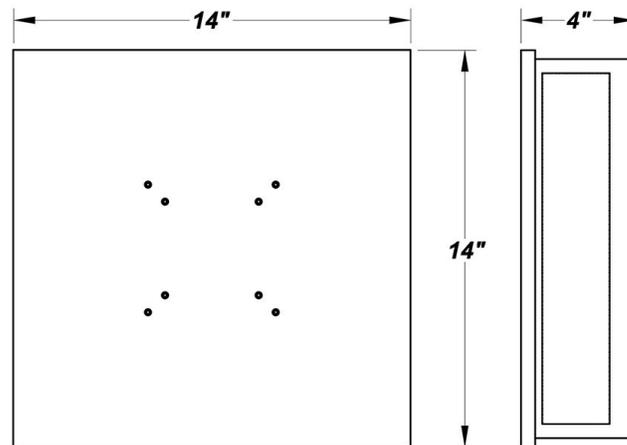


FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

CITADEL W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CTD-W - Citadel W	L20.5-ZE640 - 20.5W @ 4-Wire 0-10V Dimming Driver	120 - 277V (50/60Hz)	0-10V - 0-10V Dimming
ORDER INFO			
CTD-W	L20.5-ZE640	120 - 277V	0-10V

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused SCV - Steel Side Covers (To Allow Up/Down Lighting) TP - Tamper Resistant Screws UL - Up Light Only DL - Down Light Only SL - Side Light Only SPD - Surge Protection Device
ORDER INFO			
Not Applicable	AC	30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
CTD W	L20.5	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2640 LED Source Lumens • 125.7 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
Lens Panel Side	3073062	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.