


CITADEL Y LED

Architectural Outdoor



| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |




FEATURES

- ADA Compliant
- Aluminum Fascia w/ Textured Black Polyester Powder Coat Finish
- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- 4 Frosted F(1) Rated Acrylic Side Lens Panels
- LED Light Fixture
- Mounts Directly to 4" Junction Box (By Others) J-Box Centered in Fixture
- Mounting Hardware Included
- Wet Location
- White F(1) Rated Acrylic Front Lens Panel

LINE DRAWING

LINE DRAWING NOT TO SCALE

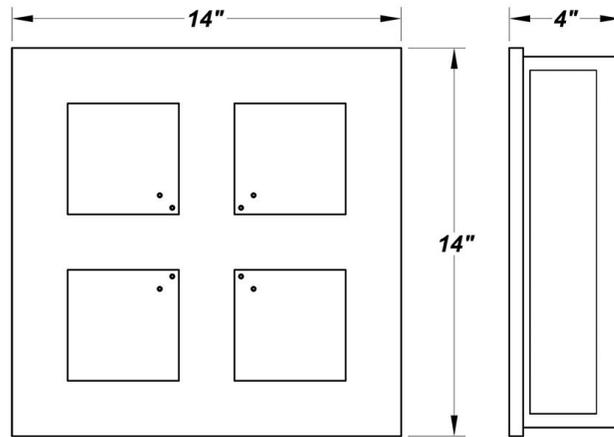


FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver




Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

CITADEL Y LED

Architectural Outdoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-------------------|--|-------------------------|-----------------------|
| CTD-Y - Citadel Y | L20.5-ZE640 - 20.5W @ 4-Wire 0-10V Dimming Driver | 120 - 277V (50/60Hz) | 0-10V - 0-10V Dimming |
| ORDER INFO | | | |
| CTD-Y | L20.5-ZE640 | 120 - 277V | 0-10V |

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS | |
|----------------|--|---|--|---|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel | TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | F - Fused SCV - Steel Side Covers (To Allow Up/Down Lighting) TP - Tamper Resistant Screws SPD - Surge Protection Device |
| ORDER INFO | | | | |
| Not Applicable | AC | 30K | F | |

Example ^ (may not represent a manufacturable product)

| PROD | SOURCE | 30K SPECS | | | |
|------|--------|--|--|--|--|
| CTDY | L20.5 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2640 LED Source Lumens • 125.7 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|------------------|---------|-------|
| Side Lens Panel | 3073062 | |
| Front Lens Panel | 3796560 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.