

DUNBAR LED 28"


Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- CSA Listed Dry Location For Wall Mount Only
- Emergency Battery Available
- LED Light Fixture
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Steel Housing w/ White Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Up / Down Lighting Option Available
- White Acrylic / DR Extruded Diffuser w/ Matte Silver Finished End Caps And Silver / White Decorative Center Trim
- 0-10V and Leading Edge (ELV) Dimming Compatible Options Available

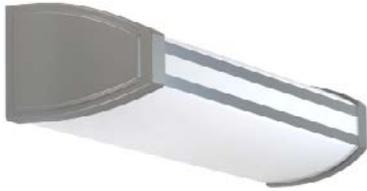

LINE DRAWING

LINE DRAWING NOT TO SCALE

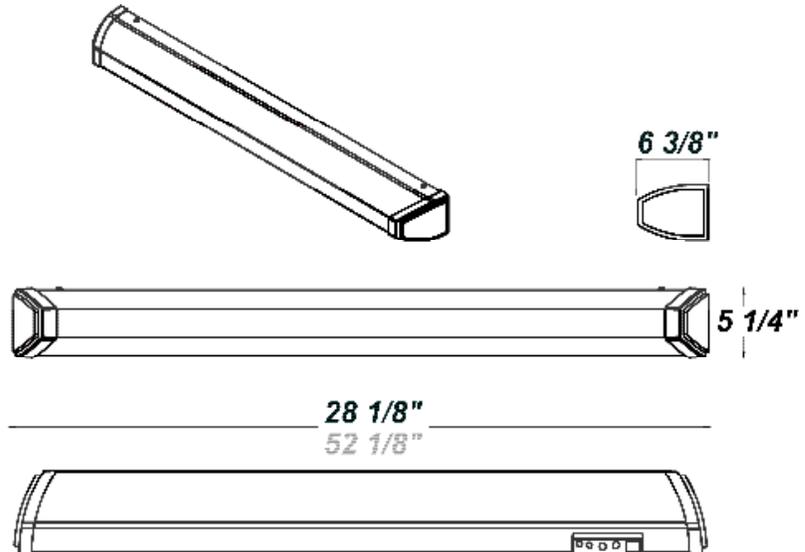

FINISHES



For RAL Colors
& Custom
Match -
Contact Teron
Lighting Inc.

DUNBAR LED 28"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
DNB24 - Dunbar 28"	L34.7-TE950 - 40W @ 950mA ELV Dimming Electronic Driver (120V - 277V Only) L38.3-ZE1050 - 42W @ 1050mA 0-10V Dimming Driver	120V 277V 347V (50 / 60Hz)	Not Applicable
ORDER INFO			
DNB24 Example ^	L34.7-TE950	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BNW - Brushed Nickel End Caps w/ Nickel And White Center Trim (Standard) WSW - White End Caps w/ Solid White Center Trim	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	CO - Convenience Outlet (120V Only) EB*** - 12W Integral EM Battery (120V and 277V Only) F - Fused (120V and 277V Only) 2C** - 2 Circuit, 2 Drivers (120V and 277V Only) MSW - Multi-Level Switching 4-Position Switch w/ Pull Chain (120V Only) NLT* - 9.4W LED Night Light (120V and 277V Only) 2SW - 2-Position Switch w/ Pull Chain (On-Off) (120V Only)
ORDER INFO			
Not Applicable Example ^	BNW	30K	2SW

PROD	SOURCE	30K SPECS				
DNB 28"	L34.7	<ul style="list-style-type: none"> 30K - 3000K Color Temp 5150 LED Source Lumens 114.5 LED Source Lumens Per Watt 				
	L38.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 5692 LED Source Lumens 126.5 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
2' White Acrylic Diffuser w/ White / Brushed Nickel Trim	3057119	* NLT Will Be Labeled as a Separate Hot Wire Connection unless NLT is Ordred With the 2SW.
2' White Acrylic Diffuser w/ Solid White Trim	3057160	** 2 Hot Wires will be provided to customer for switching.
		***EB option can not be combined with other options Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.