### EAGLE PRF LED 14"

Architectural Outdoor

# 6. 🔮 🗎 🖻 Ŧ





PROJECT: TYPE: PO#: COMMENTS:


QTY:

#### **FEATURES**

- ADA Compliant
- CSA Listed Damp Location Wall and Ceiling
- Emergency Battery Available
- IES Files Available
- LED Light Fixture
- · Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Standard PRF Ring Color is Matte Silver
- Standard Mount Pan Color is Gloss White
- Steel Mounting Pan w/ Hi-Reflectance Gloss White Powder Coat Finish



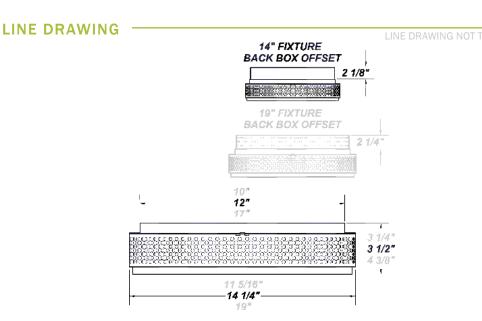

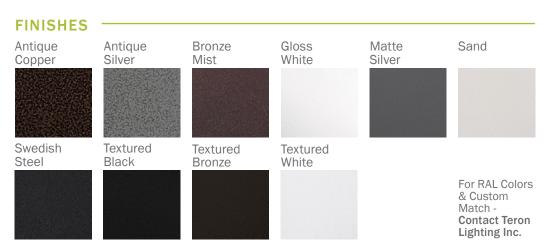



TERONLIGHTING.COM 33 DONALD DR, FAIRFIELD, OH 45014 P: 513.858.6004 F: 513.858.6038 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

### EAGLE PRF LED 14"

Architectural Outdoor

## 6. 🛯 🗎 🖻 🏹

PROJECT: TYPE: PO#: QTY: COMMENTS:

 Fixture Core
 TRIM
 SOURCE/WATTAGE
 DIMMING DRIVER


 EE14 - Eagle 14"
 PRF
 L13.5 - 13.5W
 Not Applicable

 ORDER INFO
 Interview
 Interview
 Interview

 EE14
 L17.0-ZE530
 L20.27ZV
 Not Applicable

Example ^ (may not represent a manufacturable product)

VOLTAGE		FINISH	FINISH		COLOR TEMP			
<b>UNV</b> (50 / 60Hz)		AS - Antique Silv BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silve SN - Sand	SM - Matte Silver		30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp		ALP - Aluminum Mount Pan w/ White Finisl BB - Back Box*** EB/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WAL - White Acrylic (Standard) WLL - LED High Lumen Lens WPL - White Polycarbonate	
RDER INFO							SPD – Surge Protection Device	
PRF AC				ЗОК		ALP	ALP	
Example ^	(may not represent a	manufacturable product	)					
PROD	SOURCE	30K SPECS	30K SPECS					
EE 14"	L17.0 L20.5	<ul> <li>WAL Lens</li> <li>80 CRI Typ.</li> <li>3000K Color Temp</li> <li>1071 Delivered LED Lumens</li> <li>71.6 Delivered LED Lumens Per Watt</li> <li>WAL Lens 80 CRI Ty</li> <li>30K - 3000K Color Temp</li> <li>2650 LED Source Lumens</li> <li>157 LED Source Lumens Per Watt</li> <li>WAL Lens 80 CRI Ty</li> <li>30K - 3000K Color Temp</li> <li>3100 LED Source Lumens</li> <li>151 LED Source Lumens</li> <li>151 LED Source Lumens</li> <li>151 LED Source Lumens Per Watt</li> </ul>	30K - 3000K Color Temp     2650 LED Source Lumens     157 LED Sorce Lumens Per Wa	ED tt RI Typ. tt RI Typ.				
REPLAC	CEMENT PART	PART NO	NOTES				·	
14" White Acrylic Diffuser 3011560			**AC Mode 960 Lumens			***Not CSA Damp Location Listed for Wall Mount		





 TERONLIGHTING.COM

 33 DONALD DR, FAIRFIELD, OH 45014

 P: 513.858.6004
 F: 513.858.6038

 E: SALES@TERONLIGHT.COM



rev042922

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice. 2