

# EAGLE PRF LED 19"


Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L21.0 & L37.5)
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish (For L30.0)
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location Wall and Ceiling
- Emergency Battery Available
- LED Light Fixture
- Mounting Hardware Included
- Standard Mount Pan Color is Gloss White
- Standard PRF Ring Color is Matte Silver




## LINE DRAWING

LINE DRAWING NOT TO SCALE

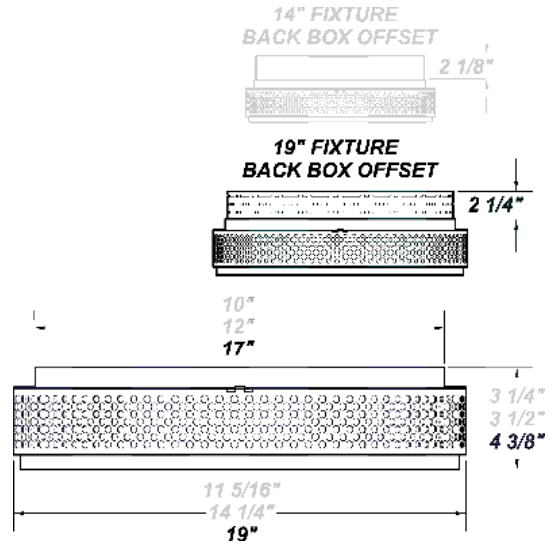

## FINISHES

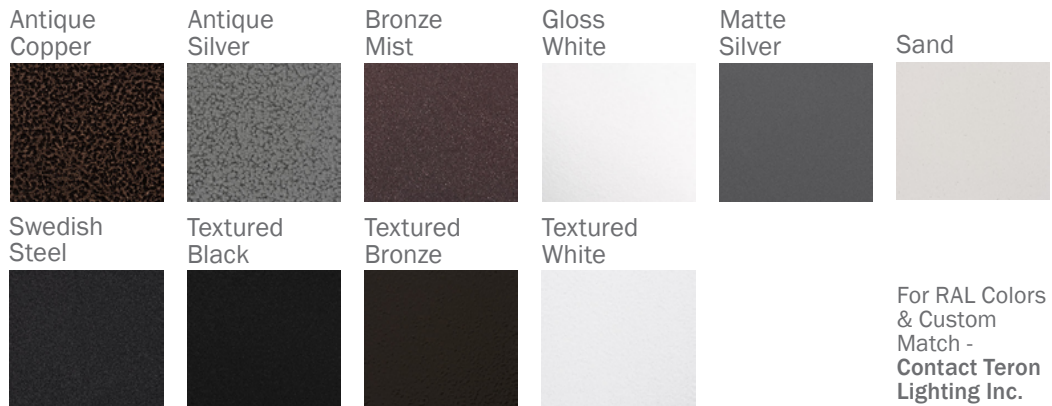

# EAGLE PRF LED 19"

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
EE19 - Eagle 19"	PRF	L21.0 - 21W L28.5 - 28.5W L37.5 - 37.5W	ZE - 0-10V Dimming
ORDER INFO			
EE19	PRF	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV (50 / 60Hz)	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>WH</b> - Gloss White (Standard) <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp <b>50K</b> - 5000K Color Temp	<b>ALP</b> - Aluminum Mount Pan w/ White Finish <b>BB</b> - Back Box*** <b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** <b>F</b> - Fused <b>SP</b> - Surge Protector (37.5 Only) <b>STC12-WH</b> - 12" Stem and Canopy Kit <b>STC24-WH</b> - 24" Stem and Canopy Kit <b>STC36-WH</b> - 36" Stem and Canopy Kit <b>STC48-WH</b> - 48" Stem and Canopy Kit <b>TP</b> - Tamper-Proof Screw Set <b>WAL</b> - White Acrylic (Standard) <b>WLL</b> - LED High Lumen Lens <b>SPD</b> - Surge Protection Device
ORDER INFO			
unv	AC	30K	ALP

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	30K SPECS
EE 19"	L20.5	<ul style="list-style-type: none"> <li>WAL Lens 80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>1643 Delivered LED Lumens</li> <li>68.2 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>WAL Lens 80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>1643 Delivered LED Lumens</li> <li>68.2 Delivered LED Lumens Per Watt</li> </ul>
	L28.5	<ul style="list-style-type: none"> <li>WAL Lens 80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>3352 Delivered LED Lumens</li> <li>99.3 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>WAL Lens 80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>3352 Delivered LED Lumens</li> <li>99.3 Delivered LED Lumens Per Watt</li> </ul>
	L37.5	<ul style="list-style-type: none"> <li>WAL Lens 80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>3843 Delivered LED Lumens</li> <li>107.4 Delivered LED Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>WAL Lens 80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>3843 Delivered LED Lumens</li> <li>107.4 Delivered LED Lumens Per Watt</li> </ul>

REPLACEMENT PART	PART NO	NOTES
19" White Acrylic Diffuser	3011960	**AC Mode 960 Lumens
19" White Acrylic LED Diffuser	3067560	Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens (Please Specify Voltage)
		***Not CSA Damp Location Listed for Wall Mount Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

rev042922