


FALDO W LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

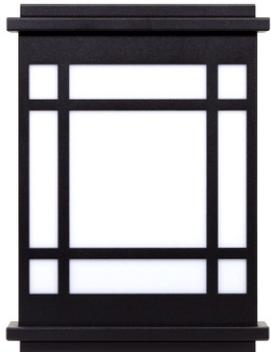


FEATURES

- ADA Compliant
- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum Heat-Sink Plate
- Aluminum Solid Top and Bottom End Plates
- CSA Listed Wet Location
- LED Light Fixture
- Luminous White Acrylic Panels
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included

LINE DRAWING

LINE DRAWING NOT TO SCALE

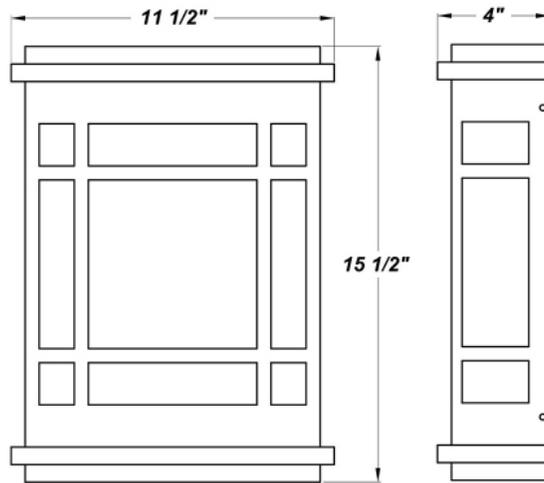

FINISHES

Antique Copper	Antique Silver	Bronze Mist	Matte Silver	Sand	Swedish Steel
Textured Black	Textured Bronze	Textured White			

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

FALDO W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FLW - Faldo W	L19.0-ZE600 - 19W @ 600mA 4-Wire 0-10V Dimming Driver L37.0-ZE1100 - 37W @ 1100mA 4-Wire 0-10V Dimming Driver	120V 277V	Not Applicable
ORDER INFO			
FLW	L19.0-ZE600	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB51 - 5.1W Integral Emergency Battery EB12 - 12W Emergency Battery (L19.0W Only) F - Fused TP - Tamper-Proof Screws SPD - Surge Protection Device
ORDER INFO			
Not Applicable	AC	30K	EB12

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
Faldo W	L19.0	<ul style="list-style-type: none"> • 80 CRI Typ. • 30K - 3000K Color Temp • 2980 LED Source Lumens • 156.8 LED Source Lumens Per Watt 				
	L37.0	<ul style="list-style-type: none"> • 80 CRI Typ. • 30K - 3000K Color Temp • 3835 LED Source Lumens • 103.6 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens Panel Set	9800660	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.