

FALDO XL LED

Architectural Outdoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Aluminum Top and Bottom End Plates
- Luminous White Acrylic Panels
- Mounts Over 4" Junction Box w/ Easy-hang Wall Mounting Plate (Included)
- CSA Approved Wet Location For Vertical Mounting
- LED Light Fixture

LINE DRAWING

LINE DRAWING NOT TO SCALE

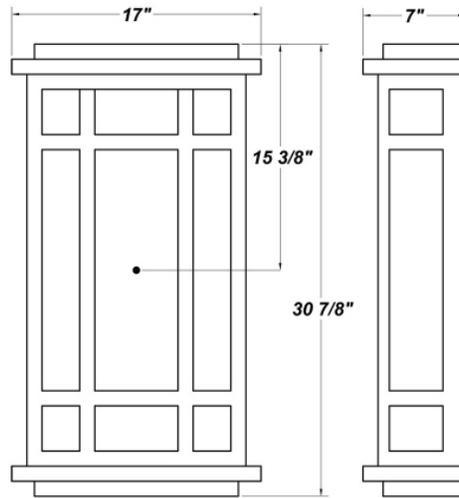


FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Metallic Black



Sand



Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

FALDO XL LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FLX - Faldo XL	L19.0-ZE700 - 30W @ 700mA 4-Wire 0-10V Dimming Driver L24.0-ZE875 - 33W @ 875mA 4-Wire 0-10V Dimming Driver L31.0-ZE1150 - 44W @1150mA 4-Wire 0-10V Dimming Driver	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
FLX	L19.0-ZE700	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	EB - Emergency Battery F - Fused TP - Tamper-Proof Screws SPD - Surge Protection Device
ORDER INFO			
Not Applicable	AC	30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
Faldo X	L19.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2489 LED Source Lumens • 113 LED Source Lumens Per Watt 			
	L24.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 3180 LED Source Lumens • 106 LED Source Lumens Per Watt 			
	L31.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 4125 LED Source Lumens • 106 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White Front Acrylic Lens Pane	3028560	Don't see the configuration you are looking for? Call us today at (513) 858-6004
White Side Acrylic Lens Pane	3028660	



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

FALDO XL LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FLX - Faldo XL	L38.0-ZE1400 - 50W @ 1400mA 4-Wire 0-10V Dimming Driver L38.0-TE1400 - 60W @ 1400mA ELV Dimming Driver	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
FLX	L38.0-ZE1400	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	EB - Emergency Battery F - Fused TP - Tamper-Proof Screws SPD - Surge Protection Device
ORDER INFO			
Not Applicable	AC	30K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
Faldo X	L38.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 4651 LED Source Lumens • 116 LED Source Lumens Per Watt • 30K - 3000K Color Temp • 5208 LED Source Lumens • 109 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White Front Acrylic Lens Pane	3028560	
White Side Acrylic Lens Pane	3028660	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.