

FAULTLESS LED 11"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- IES Files Available
- ADA Compliant
- CSA Listed Damp Location
- LED Light Fixture
- Mounting Hardware Included




LINE DRAWING

LINE DRAWING NOT TO SCALE

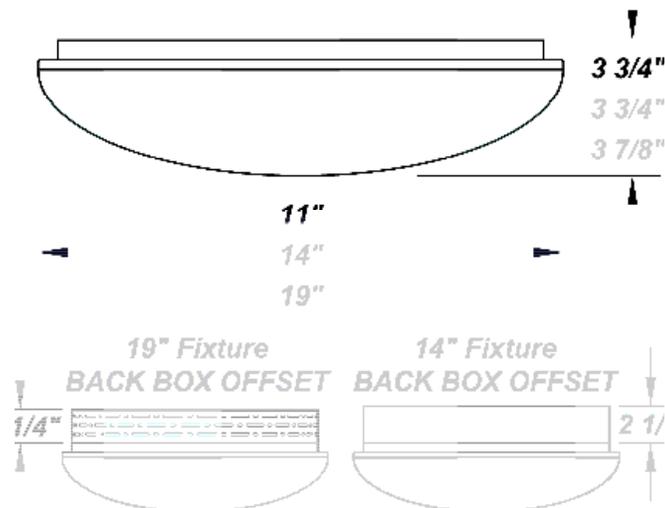

FINISHES

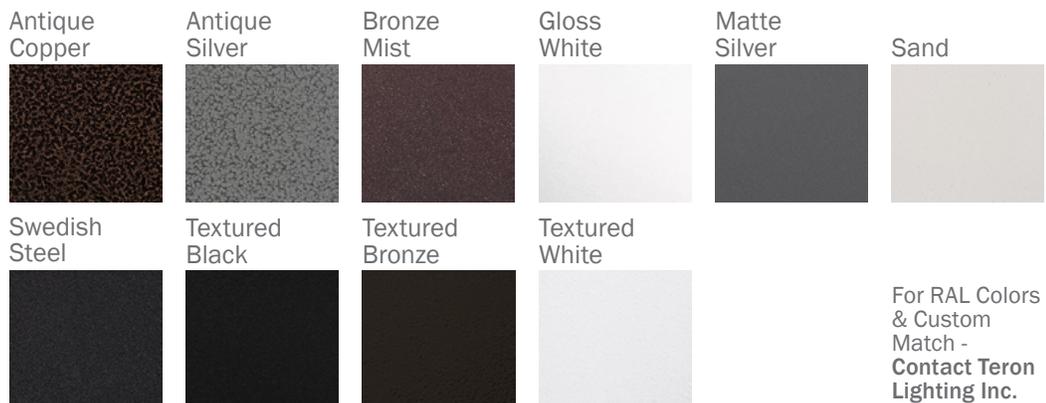

FAULTLESS LED 11"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
FS - Faultless	Not Applicable	L13.5 - 13.5W L17.0 - 17W L21.0 - 21W	ZE - 0-10V Dimming
ORDER INFO			
FS Example ^	L13.5-ZE420	120V	Not Applicable

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV - 120-277V (50 / 60Hz)	AC - Antique Copper AS - Antique Silver BT - Bronze Mist WH - Gloss White (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	ALP - Aluminum Mount Pan EE/BB - Bodine BSL26 - Up to 5.1W Emergency Illumination w/ LEDs (Back Box Required)** F - Fused STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit STC48-WH - 48" Stem and Canopy Kit TP - Tamper-Proof Screw Set WLL - LED High Lumen Lens WPL - White Polycarbonate
ORDER INFO			
Not Applicable Example ^	AC	30K	ALP

PROD	SOURCE	30K SPECS				
FS 11"	L13.5	<ul style="list-style-type: none"> 80 CRI Typ. 979 Delivered LED Lumens 65.3 Delivered LED Lumens Per Watt 				
	L17.0	<ul style="list-style-type: none"> 80 CRI Typ. 1364 Delivered LED Lumens 73.2 Delivered LED Lumens Per Watt 				
	L20.5	<ul style="list-style-type: none"> 80 CRI Typ. 1643 Delivered LED Lumens 68.2 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
11" White Acrylic Diffuser	3021160	
11" White Acrylic LED Diffuser	3053260	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.