

GOLD CUP LG MSE LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Cast Aluminum Housing w/ Textured Polyester Bronze Powder Coat Finish
- CSA Listed Wet Location For Wall Mounting
- Emergency Battery Available
- External Motion Sensor
- Fully Gasketed
- L70 Life Time For 50,000hr
- LED Light Fixture
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Ribbed Borosilicate Glass Diffuser




LINE DRAWING

LINE DRAWING NOT TO SCALE

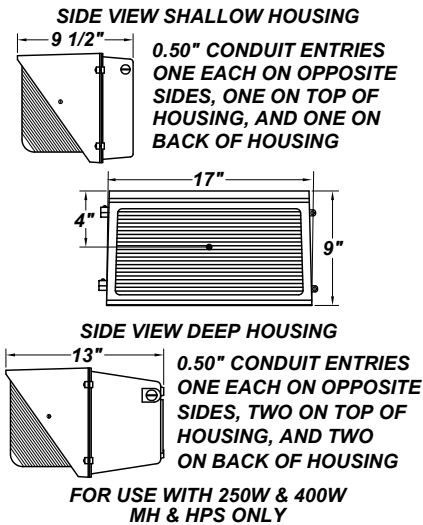

FINISHES

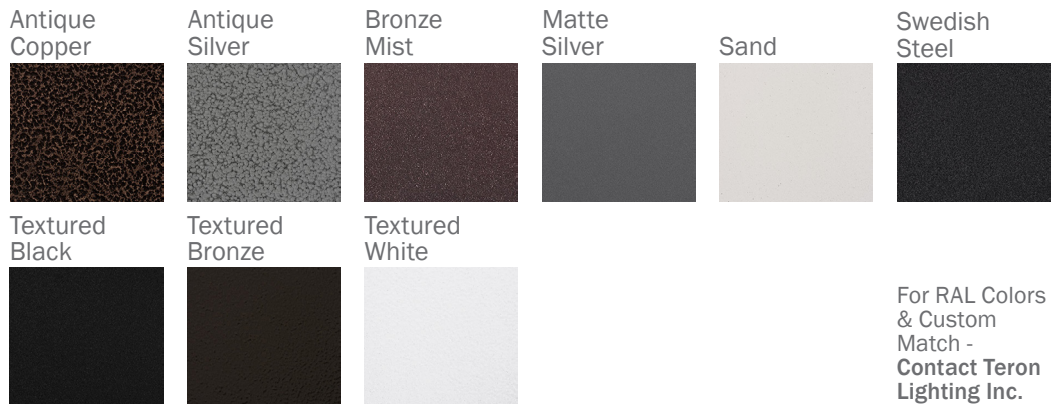

GOLD CUP LG MSE LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING BALLAST
GPL - Gold Cup LG	L48.0 - 48W LED Module	100 - 277V	Not Applicable
ORDER INFO			
GPL	L48.0	100 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
MSE - External Motion Sensor (Wattstopper FS-355 w/FSL2W Lens) (Can be Used w/ SDIM)	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured	Bronze (Standard) TW - Textured White 40K - 4000K Color Temp 50K - 5000K Color Temp	CGL - Clear Glass Lens (Standard) DIM - Dimmable Driver (0 - 10V) EBC - 6W Integral EM Battery (-20°C) Available EBW - 5.1W Emergency Battery Available F - Fused LXS - Lexan Lens Shield PCL120 - Photocell 120V PCL277 - Photocell 277V PDIM - Pulse Width Dimmable Driver (0 - 10V) SDIM - Step-Dimmable Driver (Dimmable to 25% and 50%) TP - Tamper-Proof Screw Set WGD - Steel Wire Guard
ORDER INFO			
MSE	AC	40K	CGL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	40K SPECS	50K SPECS
GPL	L48.0	<ul style="list-style-type: none"> 80 CRI Typ. 40K - 4000K Color Temp 5368 LED Source Lumens 111.8 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> 80 CRI Typ. 50K - 5000K Color Temp 5650 LED Source Lumens 117.7 LED Source Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
Ribbed Borosilicate Glass Diffuser	37129	
Frosted Ribbed Borosilicate Glass Diffuser	3712962	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.