

# INVECTA BFP LED 24"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- Steel Housing w/ Brushed Nickel Powder Coated Finish
- White Acrylic Diffuser
- ETL/cETL Listed Dry Location
- Energy Star
- Mounts Directly to Surface w/ Two Wall Anchors
- Mounting Hardware Included
- Dry Location For Surface Mount
- LED Light Fixture



## LINE DRAWING

LINE DRAWING NOT TO SCALE

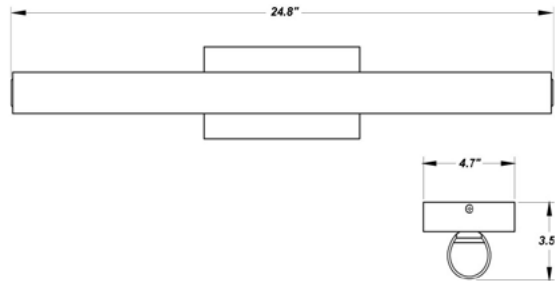

## FINISHES

Brushed  
Nickel



# INVECTA BFP LED 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
INV24 - Invecta 24"	L19.0-LT500 - (1) 17W @ 500mA	120V	Not Applicable
ORDER INFO			
INV24 Example ^	L19.0-LT500	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	BN - Brushed Nickel (Standard)	30K - 3000K Color Temp. 40K - 4000K Color Temp.	Not Applicable
ORDER INFO			
Not Applicable Example ^	BN	30K	Not Applicable

PROD	SOURCE	30K SPECS				
INV24	L19.0	<ul style="list-style-type: none"> <li>30K - 3000K Color Temp</li> <li>1520 LED Delivered Lumens</li> <li>87 LED Delivered Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
		L70 >35,000 hrs Minimum Starting Temperature = -20 Degrees C



TERONLIGHTING.COM  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.