

LANDMARK T LED

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- ADA Compliant
- Aluminum Mounting Pan & Reflector
- Constant Current at 350 Milliamps
- CSA Listed Dry Location For Wall Mounting
- Dimmable to <5%
- Dimmable With Either Triac or Electronic Dimmers
- Estimated 50,000 Hours Life (L70)
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Open Top & Bottom
- Over-Current, Over-Voltage, and Short Circuit Protection
- Steel Trim Accents w/ Matte Silver Powder Coat Finish
- UL Class 2 Driver - Power Factor >.90,
- 120V 350mA Driver is Dimmable
- 277V 350mA Drivers Are Not Dimmable

LINE DRAWING

LINE DRAWING NOT TO SCALE

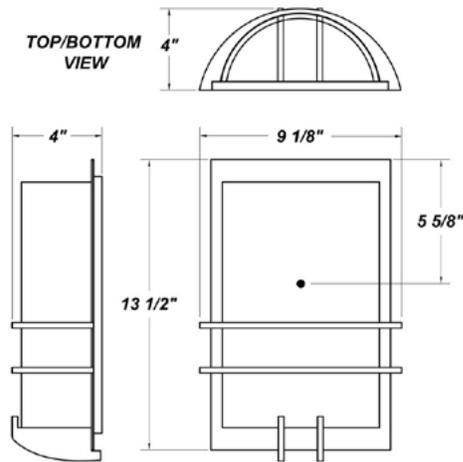


FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Sand



Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

LANDMARK T LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
LNDT - Landmark T	L16.9-LT500 - 16.9W @ 500mA Constant Current	120V - 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
LNDT Example ^	L16.9-500mA	120V - 277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	Not Applicable
ORDER INFO			
Not Applicable Example ^	SM	30K	Not Applicable

PROD	SOURCE	30K SPECS				
LNDT	L16.9	<ul style="list-style-type: none"> 80 CRI Typ. 1740 LED Source Lumens 103 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Diffuser	3041560	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.