

# NIKE C LED 14"

Architectural Indoor




PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

## FEATURES

- ADA Compliant
- CSA Listed Damp Location for Ceiling and Wall Mount
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Emergency Battery Available
- IES Files Are Available
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish



## LINE DRAWING

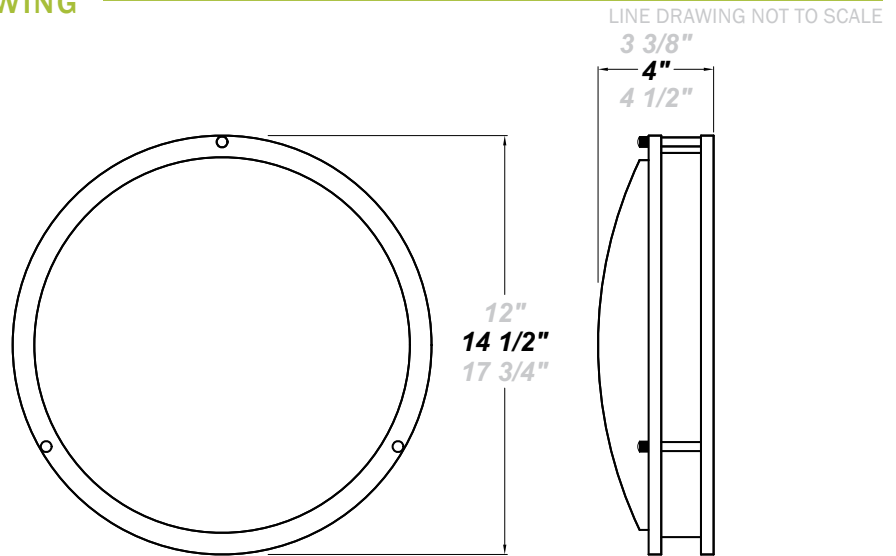


## FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver



Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# NIKE C LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC14 - Nike C 14"	<b>L13.0-ZE560</b> - (48) LED Array @ 560mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)  <b>L16.3-ZE560</b> - (60) LED Array @ 560mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	<b>120V</b> <b>277V</b> (50 / 60Hz)	<b>Not Applicable</b>
ORDER INFO			
NEC14 Example ^	L13.0-ZE560	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>Not Applicable</b>	<b>AC</b> - Antique Copper <b>TB</b> - Textured Black <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BZ</b> - Textured Bronze <b>BN</b> - Brushed Nickel (Standard) <b>TW</b> - Textured White <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp	<b>BB</b> - Back Box <b>EBW/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* <b>F</b> - Fused <b>STC12-WH</b> - 12" Stem / Canopy Kits <b>STC24-WH</b> - 24" Stem / Canopy Kits <b>STC36-WH</b> - 36" Stem / Canopy Kits <b>STC48-WH</b> - 48" Stem / Canopy Kits
ORDER INFO			
Not Applicable Example ^	AC	27K	BB

PROD	SOURCE	30K SPECS				
NEC14	L13.0	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp</li> <li>• 1700 LED Source Lumens</li> <li>• 105 LED Source Lumens Per Watt</li> <li>• 986 Delivered LED Lumens</li> <li>• 65.5 Delivered LED Lumens Per Watt</li> </ul>				
	L16.3	<ul style="list-style-type: none"> <li>• 80 CRI Typ.</li> <li>• 30K - 3000K Color Temp</li> <li>• 2110 LED Source Lumens</li> <li>• 103 LED Source Lumens Per Watt</li> <li>• 1530 Delivered LED Lumens</li> <li>• 82.3 Delivered LED Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

# NIKE C LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
NEC14 - Nike C 14"	L21.0-ZE700 - (60) LED Array @ 700mA Line Voltage 4-Wire Dimming Driver (Dimmable 0 - 10V)	120V 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
NEC14 Example ^	L21.0-ZE700	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>BN</b> - Brushed Nickel (Standard) <b>SM</b> - Matte Silver <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp <b>35K</b> - 3500K Color Temp <b>40K</b> - 4000K Color Temp	<b>BB</b> - Back Box <b>EBW/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required)* <b>F</b> - Fused <b>STC12-WH</b> - 12" Stem / Canopy Kits <b>STC24-WH</b> - 24" Stem / Canopy Kits <b>STC36-WH</b> - 36" Stem / Canopy Kits <b>STC48-WH</b> - 48" Stem / Canopy Kits
ORDER INFO			
Not Applicable Example ^	AC	27K	BB

PROD	SOURCE	30K SPECS				
NEC14	L21.0	<ul style="list-style-type: none"> <li>80 CRI Typ.</li> <li>30K - 3000K Color Temp</li> <li>2640 LED</li> <li>Source Lumens</li> <li>105 LED Source Lumens Per Watt</li> <li>1861 Delivered LED Lumens</li> <li>77.4 Delivered LED Lumens Per Watt</li> </ul>				

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	(All Stem Canopy Kits Are White Finish Unless Other Finish is Specified When Ordering) *Emergency Battery Options - AC Mode 960 Lumens Battery @ 1 second = 322 Total Lumens Battery @ 90 Minutes = 291 Total Lumens Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.