

NIKE D LED 14"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- CSA Listed Damp Location
- Die-Form Cold-Rolled Steel Housing w/ Brushed Nickel Plated Finish
- Emergency Battery Available (Except L36.0)
- LED Light Fixture
- Luminous Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Trim w/ Brushed Nickel Plated Finish



LINE DRAWING

LINE DRAWING NOT TO SCALE

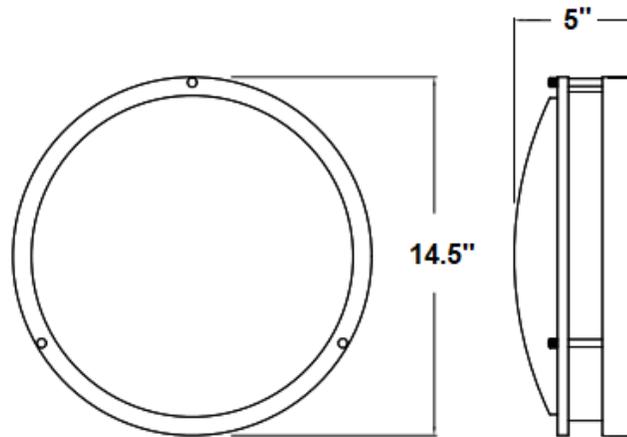


FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

NIKE D LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
NED14 - Nike D 14"	Not Applicable	L13.5 - 13.5W L17.0 - 17.0W L20.5 - 20.5W	ZE - 0-10V Dimming
ORDER INFO			
NED14 Example ^	L13.5-ZE560	120V	Not Applicable

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV (50 / 60Hz)	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB5 - 5W Emergency Integral LED Driver (EB option not available on the L36.0)
ORDER INFO			
Not Applicable Example ^	BN	30K	EB5

PROD	SOURCE	30K SPECS			
NED14	L13.5	<ul style="list-style-type: none"> 80 CRI Typ. 986 Delivered LED Lumens 65.5 Delivered LED Lumens Per Watt 			
	L17.0	<ul style="list-style-type: none"> 80 CRI Typ. 1530 Delivered LED Lumens 82.3 Delivered LED Lumens Per Watt 			
	L20.5	<ul style="list-style-type: none"> 80 CRI Typ. 1861 Delivered LED Lumens 77.4 Delivered LED Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	EB5 Not Available on The L36.0

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

rev050422

NIKE D LED 14"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	TRIM	SOURCE/WATTAGE	DIMMING DRIVER
NED14 - Nike D 14"	Not Applicable	L24.0 - 24W L36.0 - 36W	ZE - 0-10V Dimming
ORDER INFO			
NED14 Example ^	L24	unv	ze

Aesthetics & Options

VOLTAGE	FINISH	COLOR TEMP	OPTIONS
UNV (50 / 60Hz)	AC - Antique Copper AS - Antique Silver BT - Bronze Mist BN - Brushed Nickel (Standard) SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	EB5 - 5W Emergency Integral LED Driver (EB option not available on the L36.0)
ORDER INFO			
Not Applicable Example ^	BN	30K	EB5

PROD	SOURCE	30K SPECS			
NED14	L24.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3000 LED Source Lumens 125 LED Source Lumens Per Watt 			
	L36.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 3800 LED Source Lumens 105 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
14" White Acrylic Diffuser	3049660	EB5 Not Available on The L36.0

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

rev050422