

SONATA LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- ADA Compliant
- Aluminum Fascia, Arm & Mount Pan w/ Standard Matte Silver Powder Coat Finish
- Aluminum Mounting Plate Mounts to Wall Surface (Offset Over and Attached to J-Box)
- Clear Acrylic Outer Lens
- Matte White Acrylic Inner Diffuser
- Constant Current
- CSA Listed Damp Location for Wall Mount Vertical or Horizontal
- IES Files Available
- Leading and Trailing Edge Dimmable
- LED Light Fixture
- UL Class 2 Driver

LINE DRAWING

LINE DRAWING NOT TO SCALE

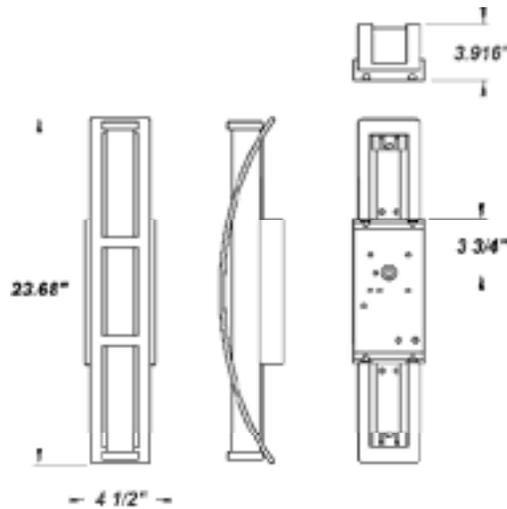

FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Textured White



Sand



Swedish Steel



Textured Black



Textured Bronze



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

SONATA LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

Fixture Core

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
SNA - Sonata LED	L20.0-LT700 - 20.0W @ 700mA Leading and Trailing Edge Dimming L17.1-LT600 - 17.1W @ 600mA Leading and Trailing Edge Dimming L10.0-LT350 - 10.0W @ 350mA Leaging and Trailing Edge Dimming	120-277V (50/60Hz)	LT - Leading and Trailing Edge Dimming
ORDER INFO			
SNA Example ^	L20.0-LT700	120-277V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused SP - Surge Protector TP - Tamper Resistant Screws
ORDER INFO			
Not Applicable Example ^	AC	30K	F

PROD	SOURCE	30K SPECS	40K SPECS	50K SPECS
SNA	L20.0	<ul style="list-style-type: none"> • 30K - 3000K Color Temp • 2280 LED Source Lumens • 114 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> • 40K - 4000K Color Temp • 2324 LED Source Lumens • 116 LED Source Lumens Per Watt 	<ul style="list-style-type: none"> • 50K - 5000K Color Temp • 2372 LED Source Lumens • 118 LED Source Lumens Per Watt

REPLACEMENT PART	PART NO	NOTES
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.