

TIGER LED

Architectural Indoor




| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

FEATURES

- ADA Compliant
- Centered Over and Mounted to 4" J-Box (By Others)
- CSA Listed Dry Location For Wall Mount
- Dimmable to 10%
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Open Top and Bottom
- Optional Surge Protector
- Steel Fascia with Matte Silver Powder Coat Finish
- Steel Mounting Plate Mounts to Flat Surface

LINE DRAWING

LINE DRAWING NOT TO SCALE

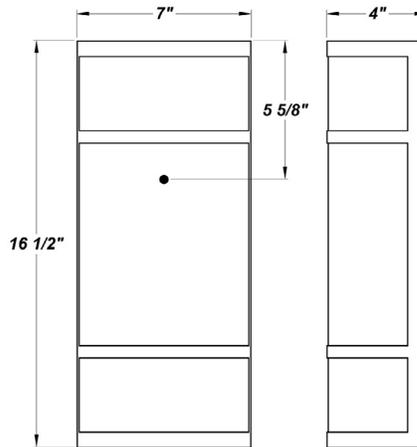

FINISHES

Antique Copper



Antique Silver



Bronze Mist



Matte Silver



Sand



Swedish Steel



Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

TIGER LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------|--|--|----------------|
| TGR - Tiger | L12.0-LT350 - 12.0W LED Strips @ 350mA 2-Wire Trailing or Leading Edge Driver L12.0-ZE350 - 12.0W LED Strips @ 350mA Low Voltage 4-Wire Dimming Electronic Driver | 120-277V (120-230V Dimmable For Most LT LED Drivers) (ZE 0-10V Drivers Are Dimmable From 120V - 277V) | Not Applicable |
| ORDER INFO | | | |
| TGR Example ^ | L12.0-LT350 | 100-277V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|---|--|--|
| Not Applicable | AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze SM - Matte Silver (Standard) TW - Textured White SN - Sand SW - Swedish Steel | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | F - Fused S - Surge Protector TBC - Perforated Steel Top & Bottom Covers TCV - Perforated Steel Top Cover |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 30K | F |

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|--|--|--|--|--|
| TGR | L12.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1400 LED Source Lumens 116.7 LED Source Lumens Per Watt | | | | |
| | L18.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1986 LED Source Lumens 110.3 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--------------------|---------|---|
| White Acrylic Lens | 3040960 | |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

TIGER LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------|--|--|----------------|
| TGR - Tiger | L18.0-LT500 - 18.0W LED Strips @ 500mA 2-Wire Trailing or Leading Edge Driver L18.0-ZE500 - 18.0W LED Strips @ 500mA Low Voltage 4-Wire Dimming Electronic Driver | 120-277V (120-230V Dimmable For Most LT LED Drivers) (ZE 0-10V Drivers Are Dimmable From 120V - 277V) | Not Applicable |
| ORDER INFO | | | |
| TGR Example ^ | L18.0-ZE500 | 100-277V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|---|--|--|
| Not Applicable | AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze SM - Matte Silver (Standard) TW - Textured White SN - Sand SW - Swedish Steel | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | F - Fused S - Surge Protector TBC - Perforated Steel Top & Bottom Covers TCV - Perforated Steel Top Cover |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 30K | F |

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|--|--|--|--|--|
| TGR | L18.0 | <ul style="list-style-type: none"> • 30K - 3000K Color Temp • 1986 LED Source Lumens • 110.3 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--------------------|---------|-------|
| White Acrylic Lens | 3040960 | |

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

TIGER LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|------------------|---|--|----------------|
| TGR - Tiger | L18.0-ZE500 - 18.0W LED Strips @ 500mA Low Voltage 4-Wire Dimming Electronic Driver | 347V (ZE 0-10V Drivers are Dimmable @ 347V) | Dimmable 0-10V |
| ORDER INFO | | | |
| TGR Example ^ | L18.0-ZE500 | 347V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|--|--|--|
| Not Applicable | AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White | 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp | S - Surge Protector TBC - Perforated Steel Top & Bottom Covers TCV - Perforated Steel Top Cover |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 30K | F |

| PROD | SOURCE | 30K SPECS | | | |
|------|--------|--|--|--|--|
| TGR | L18.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1986 LED Source Lumens 110.3 LED Source Lumens Per Watt | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--------------------|---------|---|
| White Acrylic Lens | 3040960 | |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.