

VERPLANK LED

Architectural Indoor




| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

FEATURES

- ADA Compliant
- Constant Current at 350 Milliamps
- CSA Listed Dry Location For Wall Mounting
- Dimmable to <5% With Either Triac or Electronic Dimmers
- Matte White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- Over-Current, Over-Voltage, and Short Circuit Protection
- Steel Housing and Steel Perforated Top and Bottom Covers with Coat Finish
- Steel Mounting Pan with Hi-Reflectance White Powder Coat Finish
- UL Class 2 Driver - Power Factor >.90


LINE DRAWING

LINE DRAWING NOT TO SCALE

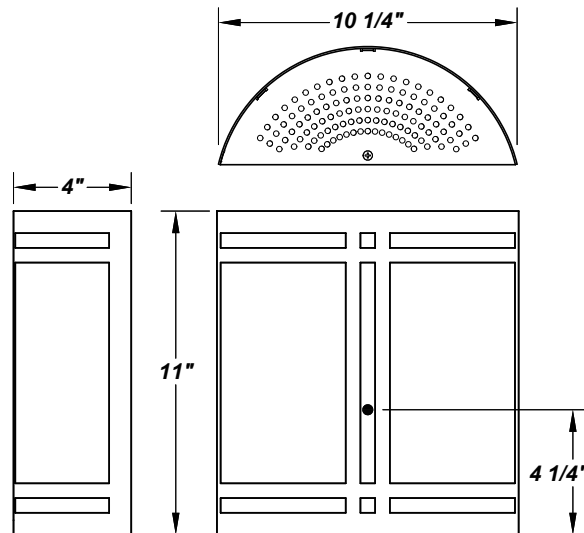


FINISHES

Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

VERPLANK LED

Architectural Indoor



Fixture Core

| | |
|-----------|------|
| PROJECT: | |
| TYPE: | |
| PO#: | QTY: |
| COMMENTS: | |

| PRODUCT CODE | SOURCE/WATTAGE | VOLTAGE | DIMMING DRIVER |
|-----------------|--|----------------------------|----------------|
| VK - Verplank | L12.5 - 12.5W @350mA ELV 2-Wire Dimmable Driver L25.0 - 25.0W @350mA ELV 2-Wire Dimmable Driver | 120V - 120V 277V - 277V | Not Applicable |
| ORDER INFO | | | |
| VK Example ^ | L12.5 | 120V - 120V | Not Applicable |

Aesthetics & Options

| TRIM | FINISH | COLOR TEMP | OPTIONS |
|-----------------------------|---|--|-----------|
| Not Applicable | AC - Antique Copper Bronze AS - Antique Silver TW - Textured White BT - Bronze Mist SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured | 40K - 4000K Color Temp 35K - 3500K Color Temp 30K - 3000K Color Temp | F - Fused |
| ORDER INFO | | | |
| Not Applicable Example ^ | AC | 40K | F |

| PROD | SOURCE | 30K SPECS | | | | |
|------|--------|---|--|--|--|--|
| VK | L12.5 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 1195 LED Source Lumens 95.6 LED Source Lumens Per Watt | | | | |
| | L25.0 | <ul style="list-style-type: none"> 30K - 3000K Color Temp 2390 LED Source Lumens 95.6 LED Source Lumens Per Watt | | | | |

| REPLACEMENT PART | PART NO | NOTES |
|--------------------|---------|---|
| White Acrylic Lens | 3018760 | |
| | | Don't see the configuration you are looking for? Call us today at (513) 858-6004 |



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.