

# VICEROY LG LED MSI 24"

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


## FEATURES

- 0-10V and Trailing Edge (ELV) Dimming Compatible Options Available
- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mount
- [Internal Motion Sensor](#)
- Knockouts on Back Accept Standard Electrical Fittings (By Others)
- LED Light Fixture
- Lighting Facts, IES, & Title 24 Labeling / Certification
- Matte White Acrylic Inner & Clear Acrylic Outer Lens Assembly
- Mounts Directly to Surface with Two Wall Anchors (Not Included) Over a 2" Junction Box (Not Included)
- Over-Voltage, Over-Current, and Short-Circuit Protection with Auto Recovery
- Steel Housing with Matte Silver Powder Coat Finish



## LINE DRAWING

LINE DRAWING NOT TO SCALE

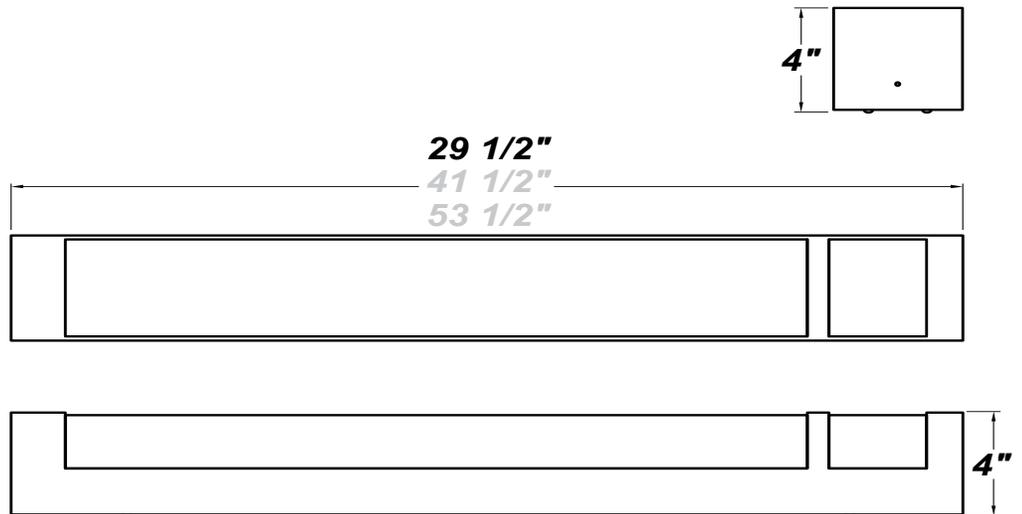


## FINISHES

Antique Copper




Antique Silver



Bronze Mist



Matte Silver



Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

# VICEROY LG LED MSI 24"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING BALLAST
<b>VCYL24</b> - Viceroy LG 24"	<b>L20.1-ZE550</b> - 22W @ 550mA Constant Current Dimming Electronic Driver (Dimmable 0-10V), <b>L20.1-TE550</b> - 30W @ 550mA Constant Current ELV Dimming Electronic Driver	<b>120V</b> <b>277V</b> (50 / 60Hz)	<b>SDxx</b> - Bi-Level Step Dimming from 10-70% in increments of 10% (replace xx in ordering code with requested dim to dimming percentage)
ORDER INFO			
VCYL24	L20.1-ZE550	120V	SD50

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
<b>MSI</b> - Wattstopper <b>FM-105</b> Internal Motion Sensor	<b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>SM</b> - Matte Silver (Standard) <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>TB</b> - Textured Black <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White	<b>30K</b> - 3000K Color Temp. <b>35K</b> - 3500K Color Temp. <b>40K</b> - 4000K Color Temp. <b>51K</b> - 5100K Color Temp.	<b>EB</b> - BSL310 Emergency Driver <b>TP</b> - Tamper Resistant Screws <b>F</b> - Fused
ORDER INFO			
MSI	AC	35K	EB

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS	35K SPECS	40K SPECS	50K SPECS
<b>VCYL24</b>	L20.1-ZE550	<ul style="list-style-type: none"> <li>• 30K - 3000K Color Temp. Nominal</li> <li>• 1767 Delivered Lumens</li> <li>• 23.43 Delivered Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>• 35K - 3500K Color Temp. Nominal</li> <li>• 1799 Estimated Delivered Lumens</li> <li>• 24.26 Estimated Delivered Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>• 40K - 4000K Color Temp. Nominal</li> <li>• 1863 Estimated Delivered Lumens</li> <li>• 24.26 Estimated Delivered Lumens Per Watt</li> </ul>	<ul style="list-style-type: none"> <li>• 50K - 5000K Color Temp. Nominal</li> <li>• 1928 Estimated Delivered Lumens</li> <li>• 24.2 Estimated Delivered Lumens Per Watt</li> </ul>

REPLACEMENT PART	PART NO	NOTES
2' MSI Lens Assembly	38103	*Don't see the configuration you are looking for? Call us today at (513) 858-6004



**TERONLIGHTING.COM**  
 33 DONALD DR, FAIRFIELD, OH 45014  
 P: 513.858.6004 F: 513.858.6038  
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.