

VOLARE LED

Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- ADA Compliant
- Back-Lit LED Mirror
- Color Selecting Touch Sensor
- Defogger
- ETL/cETL Listed for Damp Locations
- Glass Composition
- LED Light Fixture
- T24 Listed
- Wall Mounted
- 15.7 lbs.
- 80+ CRI

LINE DRAWING

LINE DRAWING NOT TO SCALE

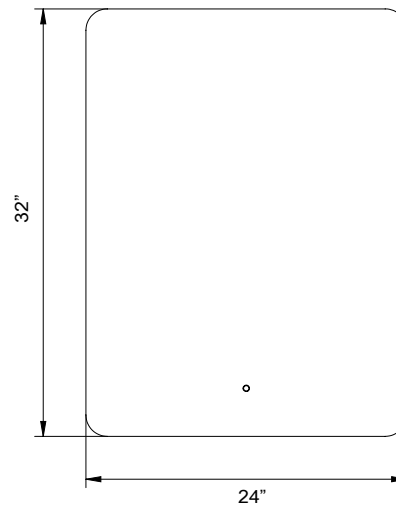

FINISHES

For RAL Colors
& Custom
Match -
**Contact Teron
Lighting Inc.**

VOLARE LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
VLR - Volare LED	L30.0-LT2000 - 30.0W @ 2000mA Constant Current Electronic Driver (Non-Dimmable)	120V	Not Applicable
ORDER INFO			
VLR	L30.0-LT2000	120V	Not Applicable
Example ^			

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	Not Applicable	27K-65K - 2700K-6500 Color Temp	Not Applicable
ORDER INFO			
Not Applicable	Not Applicable	27K-30K	Not Applicable
Example ^			

PROD	SOURCE	30K SPECS				
VLR	L30.0	<ul style="list-style-type: none"> 30K - 3000K Color Temp 3000 LED Source Lumens 100 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM

We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.