



Expertly designed to guide every step with precision and style, Sentier serves as the benchmark for step lighting. Its heavy-duty and durable construction is approved for wet locations, making it versatile and dependable for a multitude of environments from multifamily complexes to bustling retail and commercial spaces. Its refined design ensures low up-light, casting a subtle yet effective glow, ensuring safety and aesthetic cohesiveness. For spaces that demand reliability paired with sophisticated illumination, Sentier is the definitive choice.

## LED Engine

**Color Temp (CCT):** 3000K, 3500K, 4000K  
**CRI:** 80+ (consult factory for 90+)  
**Life Expectancy:** L70 rated at 50,000+ hours  
**Binning:** 3-step Macadam  
**Output:** Min 292 Delivered Lumens  
 Max 1274 Delivered Lumens


## Driver

**Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz  
**Dimming:** 0-10V and Phase (Leading or Trailing edge)  
**Efficiency:** Min 92%  
**Operating Temp:** -40°C / -40°F to 50°C / 122°F  
**FCC Noise:** Meets FCC Title 47 EMC Part 15 limits

## Certifications

**Location Listing:** Wet Location Rated for Wall Mounting  
**Other:** ADA Compliance: ADA compliant  
 Buy America Compliant

## Dimensions

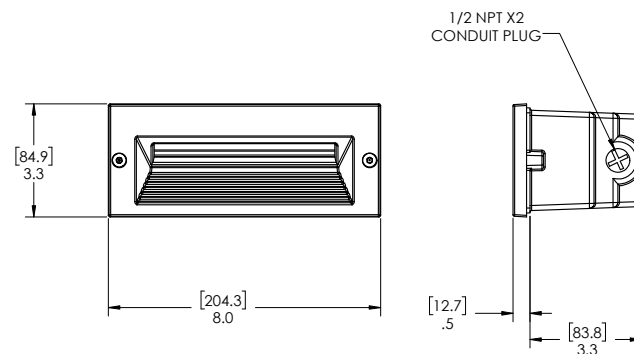

## Construction

**Housing:** Cast aluminum with half-inch NPT conduit entry (both sides). **Face plate:** cast aluminum with impact resistant polycarbonate diffuser. **Finish:** high quality polyester powder coating, various finishes. **Hardware:** stainless steel. **Mounting:** recess-mounted into poured concrete or masonry wall.

## Catalog String

### Fixture Core

STR

1

2

3

4

UNIV

5

### Aesthetics & Options

6

7


8

## Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
STR	Not Applicable	L4.0 L7.0 L13.0 (ZE only)	ZE - 0-10V Dimming TE - Leading & Trailing Edge	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
FBK - Fine Textured Black FBZ - Fine Textured Bronze FWH - Fine Textured White FSV - Fine Textured Silver	30K - 3000K 35K - 3500K 40K - 4000K	SPD - Surge Protection Device DL - Diffused Lens		

## Performance

Wattage	Delivered Lumens	Efficacy LM/W	CCT
L4.0	372	99	3000K
L7.0	626	85	
L13.0	1105	85	



### Polar Graph Details:

**IES File Name:** STR-L13.0-ZE-UNV-XX-30K.IES

Maximum Candela = 468 Located At Horizontal Angle = 0, Vertical Angle = 35

# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (35) (Through Max. Cd.)

BUG Rating: B0-U2-G1