

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


BIRDIE OVAL CA



COMPACT FLUORESCENT

FEATURES

- Die-Cast Aluminum Housing w/ Matte White Polyester Powder Coat Finish
- Die-Cast Aluminum Grill (Standard) w/ Matte White Polyester Powder Coat Finish
- Frosted Ribbed Borosilicate Glass Diffuser
- Front & Back Gasketing
- Stainless Steel Housing Screws
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- CSA Listed Wet Location For Wall or Ceiling Mount, Including PCL Option

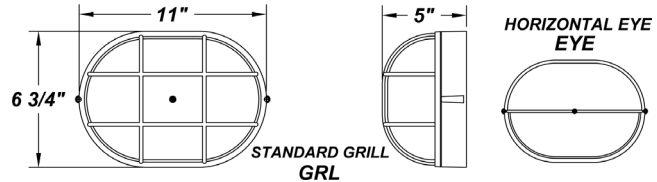

ORDERING INFORMATION

Example : (BEOC213Q - 120E - GRL - TB - 35K) Matte White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	FASCIA	FINISH	OPTIONS
Birdie Oval CA	BEOC113Q - (1) 13W QE BEOC213Q - (2) 13W QE BEOC118Q - (1) 18W QE BEOC126Q - (1) 26W QE BEOC132X - (1) 32W TBX BEOC142X - (1) 42W TBX BEOC100A19 - (1) 100W Incandescent	120E - Electronic 120V 277E - Electronic 277V	GRL - Birdie Grill (Standard) EYE - Birdie Eye	WH - Matte White (Standard) SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper Resistant Screws DIM - Dimming Ballast (QE Electronic Only) MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS PART NO.

Frosted Glass Lens	3700562
White Polycarbonate Lens	3406260
Birdie Oval GRL Fascia	5501599
Birdie Oval EYE Fascia	5501799
(Please Specify Color of Fascia When Ordering)	

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.