




INSTALLATION & MAINTENANCE INSTRUCTIONS
FOR THE
NEPTUNE PENDANT MOUNT - LED
Ceiling Mounted Luminaire P.N.: 76173 REV. 1

WARNING: DISCONNECT POWER PRIOR TO INSTALLATION OR SERVICING OF FIXTURE

NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE LOCAL & NATIONAL ELECTRICAL CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND FAMILIAR WITH THE OPERATION OF THE PRODUCT AND HAZARDS INVOLVED.

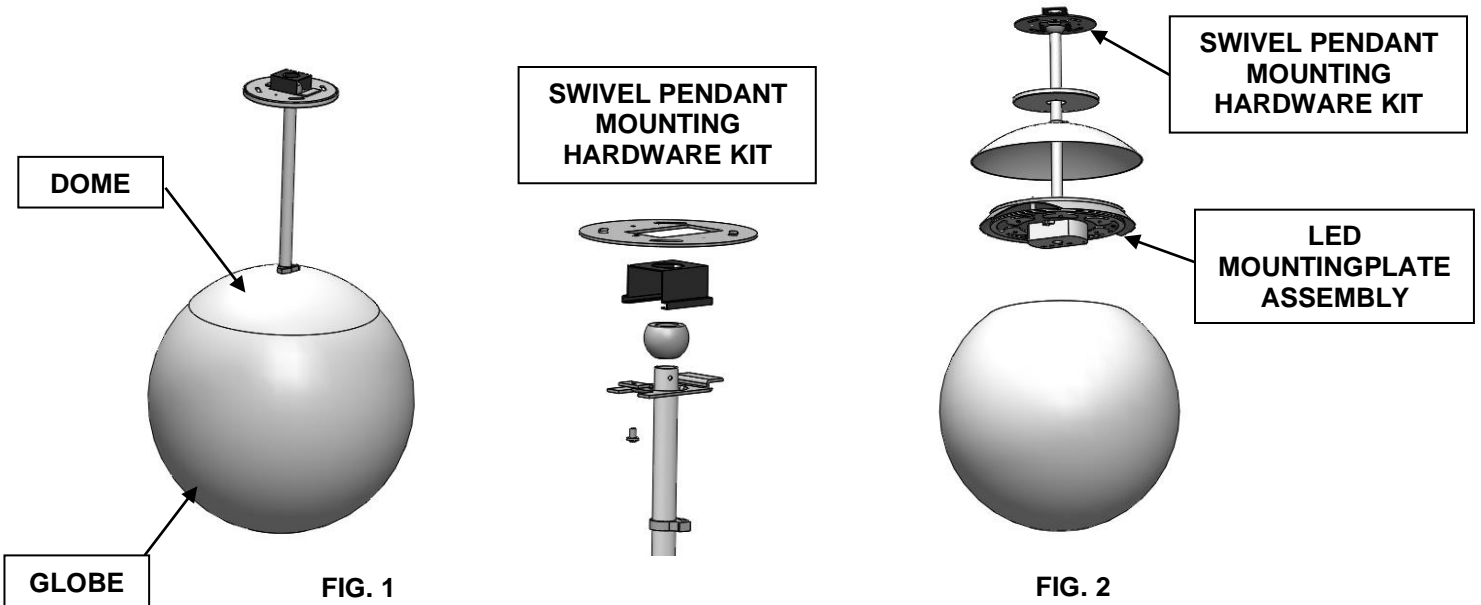

INSTALLATION

1. Remove any excess packing from the fixture.
2. Locate Pendant Swivel Mount Kit (MP-SW2/8RD MAG ADJ TK) with separate instruction sheet. Follow instructions on kit to assemble swivel mount assembly.
3. Slide dish down onto pendant tube assembly, dome side up. Next, slide plastic grip clamp onto pendant tube.
4. Following the Pendant Systems swivel mount kit instructions, slide the 5" round cover over end of pendant stem tube. Next slide the MP plate over the end of the tube, offset bends should point upward. Slide half ball casting onto end of tube with curved surface facing downward and secure in place with kit hardware. Reference and follow Pendant Systems instructions to secure mounting hardware to pendant tube assembly. **See Fig. 2.**
5. Mount Pendant Systems MP crossbar and swivel mount assembly to the junction box with the 8-32 junction box screws, (provided by others).
6. Connect the fixture leads to the supply line leads. TLI stipulates the BLACK lead as line voltage, WHITE lead as common and BARE/GREEN lead as ground. See wiring diagram below.
7. Slide 5" cover up to ceiling and over swivel assembly. Magnets will hold the cover in place.
8. Next assemble the globe to the fixture by sliding it over the led mount assembly so that the LED mount assembly goes inside the globe. Slide the dome, down over the open end of the globe and secure in place with the plastic grip clamp.
9. Last, restore the power to the circuit.

NOTE: PENDANT STEMS CAN VARY IN LENGTH.

MAINTENANCE:


DO NOT use cleansers containing bleach.

The metal portion of the fixture can be wiped clean as needed using a mild soap solution.

ATTENTION:

Avoid moving any exposed wires. If any wires are accidentally disconnected, call a professional to repair.

WIRING DIAGRAM

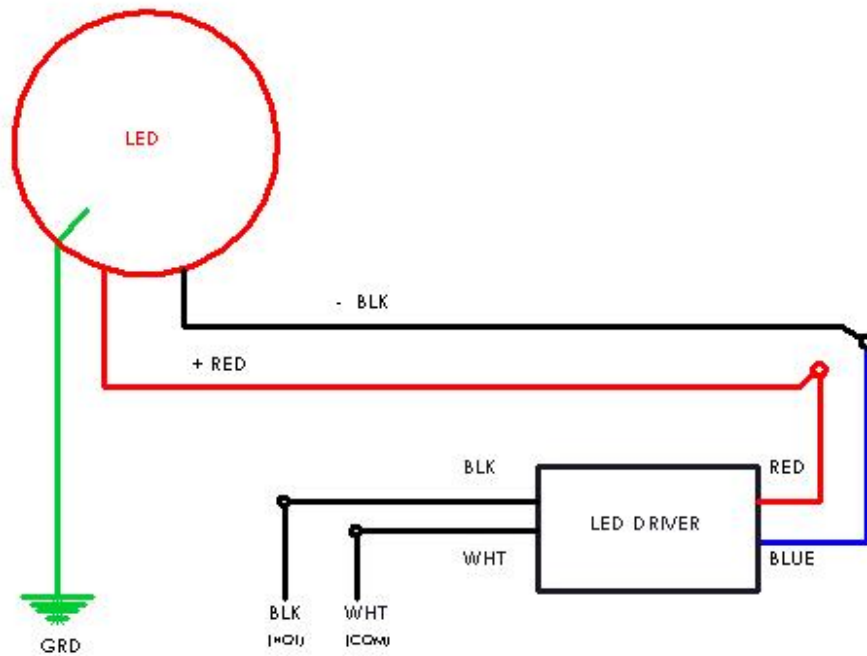

NEPTUNE - LED - WIRING DIAGRAM.