


INSTALLATION & MAINTENANCE INSTRUCTIONS
FOR THE

CADDY M

Wall Mounted Luminaire



TLI
Teron Lighting, Inc.

Echelon
COLLECTION

TERON
SERIES


79081

INSTALLATION

- 1] Remove any excess packing from the fixture.
- 2] These fixtures are designed to be mounted directly to a J-Box via the included mounting plate. Remove the housing screws from the fixture, then open the door frame assembly. Install the lamp, then replace the door frame assembly and secure with the housing screws.
- 3] Install the provided self-adhesive gasket to the back of the mounting plate. Install the mounting plate to the J-Box. Seat the fixture onto the mounting plate, and secure with the retaining screws.
- 4] Connect the fixture leads to the supply leads. TLI stipulates the Black as Line; White as Common; Bare/Green as Ground. Connections should be made in the compartment opposite the ballast compartment. Make sure no wires rest against the reflector.
- 5] Check the re-lamp label to ensure that the lamp is the specified wattage. HID Lamps should be hand tight. For best operation, screw in the HID lamp, remove, & re-tighten. Fluorescent lamps will not snap into incorrect lampholders.
- 6] Outdoor wall fixtures must be caulked with a suitable waterproof sealant across the top, and at least 2" down each side of the fixture to properly seal it to the mounting surface. A small space should be open at the bottom for excess moisture runoff.

NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

HOUSING
SCREWS

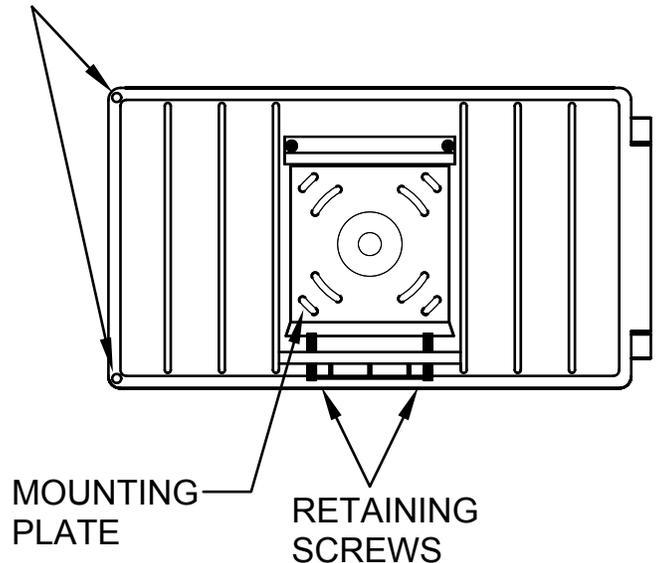

MAINTENANCE

The lens should be cleaned once every 6 months. Repeat the above procedures in reverse to remove the lens. It must be washed in a mild soap solution. DO NOT use cleansers containing bleach. Re-assemble the fixture.

The metal portion of the fixture can be wiped clean as needed using a mild soap solution.

ATTENTION: Avoid moving any exposed wires. If any wires are accidentally disconnected, call a professional to repair.

These instructions are general to the fixtures noted.
Due to the numerous options, all variations may
not be covered.

Installation of an electrical luminaire must be
performed by a qualified professional. The
fixture must be wired in accordance to all
local & national electrical codes.