

CORNERSTONE W LED

Architectural Outdoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Tempered Glass Diffusers
- Constant Voltage Modules
- Thermal Compensation Technology Ensures Longer LED Lifetime - Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- Mounts Direct to Flat Surface w/ Two #8 Wall Anchors (Not Included)
- Surge Protector
- CSA Listed Wet Location
- Emergency Battery Available
- LED Light Fixture




LINE DRAWING

LINE DRAWING NOT TO SCALE

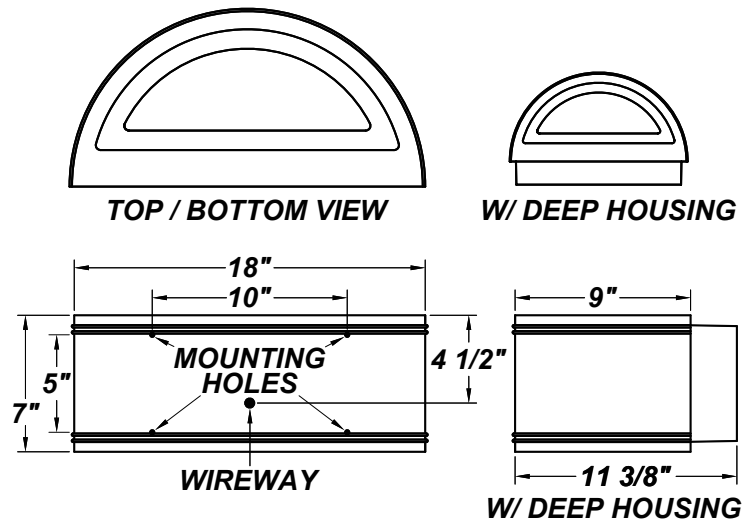

FINISHES

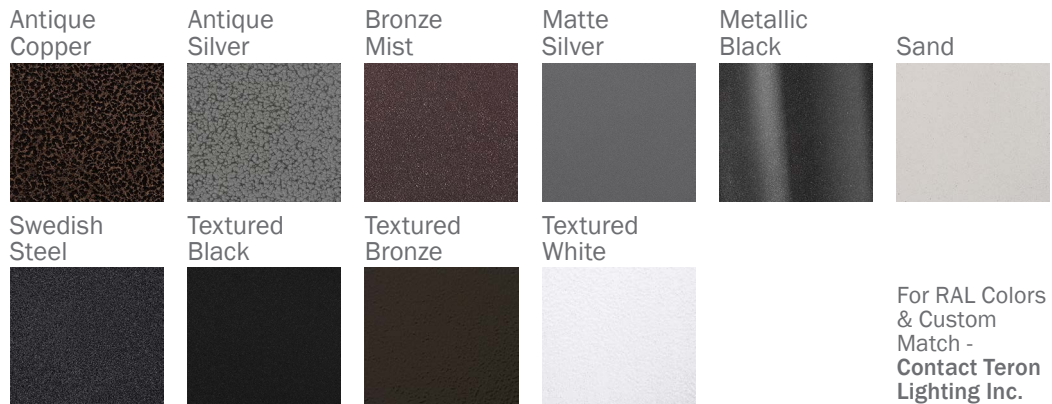

CORNERSTONE W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CRNW - Cornerstone W	L112.3-12CV - 16W @ 12V Constant Voltage Non-Dimming Driver (UL/DL required) L212.3-12CV - 32W @ 12V Constant Voltage Non-Dimming Driver	120 - 277V	Not Applicable
ORDER INFO			
CRNW	L112.3-12CV	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black (Standard) AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze MB - Metallic Black SM - Matte Silver TW - Textured White SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	DL - Downlight Only EB - Integral EM Battery (Downlight) (L112.3 Only) FGL - Frosted Glass Lens PCL - Photocell UL - Uplight Only (L112.3 Only)
ORDER INFO			
Not Applicable	AC	30K	DL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
CRNW	L112.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1264 LED Source Lumens 102.8 LED Source Lumens Per Watt 1285 Delivered LED Lumens 71.4 Delivered LED Lumens Per Watt 				
	L212.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2528 LED Source Lumens 78 LED Source Lumens Per Watt 2355 Delivered LED Lumens 70.4 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
Clear Glass Lens	37028	
Black Glass Lens	3702824	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

CORNERSTONE W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CRNW - Cornerstone W	L124.5-12CV - 32W @ 12V Constant Voltage Non-Dimming Driver (UL/DL required) L224.5-12CV - 64W @ 12V Constant Voltage Non-Dimming Driver	120 - 277V	Not Applicable
ORDER INFO			
CRNW	L124.5-12CV	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black (Standard) AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze MB - Metallic Black SM - Matte Silver TW - Textured White SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	DL - Downlight Only EB - Integral EM Battery (Downlight) (L124.5 Only) FGL - Frosted Glass Lens PCL - Photocell UL - Uplight Only (L124.5 Only)
ORDER INFO			
Not Applicable	AC	30K	DL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
CRNW	L124.5	<ul style="list-style-type: none"> 30K - 3000K Color Temp 2528 LED Source Lumens 103.2 LED Source Lumens Per Watt 2442 Delivered LED Source Lumens 76.3 Delivered Lumens Per Watt 				
	L224.5	<ul style="list-style-type: none"> 30K - 3000K Color Temp 5056 LED Source Lumens 102.1 LED Source Lumens Per Watt 4796 Delivered LED Lumens 74.9 Delivered LED Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
Clear Glass Lens	37028	
Black Glass Lens	3702824	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

CORNERSTONE W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CRNW - Cornerstone W	L115.3-ZE12V - 20W @ 0-10V Dimming Driver Downlight L221.5-ZE12V - 56W @ 0-10V Dimming Drive	120 - 277V	Not Applicable
ORDER INFO			
CRNW	L115.3-ZE12V	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	DL - Downlight Only FGL - Frosted Glass Lens PCL - Photocell
ORDER INFO			
Not Applicable	AC	30K	DL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
CRNW	L115.3	<ul style="list-style-type: none"> 30K - 3000K Color Temp 1580 LED Source Lumens 103.3 LED Source Lumens Per Watt 1541 Delivered LED Lumens 73.4 Delivered LED Lumens 			
	L221.5	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4424 LED Source Lumens 102.9 LED Source Lumens Per Watt 4057 Delivered LED Lumens 72.4 Delivered LED Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
Clear Glass Lens	37028	
Black Glass Lens	3702824	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

CORNERSTONE W LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CRNW - Cornerstone W	L218.1-ZE1100 - 42W @ 1100mA 0-10V Dimming Driver	120 - 277V	Not Applicable
ORDER INFO			
CRNW	L218.1-ZE1100	120 - 277V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	DL - Downlight Only EB - Integral EM Battery (Downlight) FGL - Frosted Glass Lens PCL - Photocell
ORDER INFO			
Not Applicable	AC	30K	DL

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS			
CRNW	L218.1	<ul style="list-style-type: none"> 30K - 3000K Color Temp 5465 LED Source Lumens 151 LED Source Lumens Per Watt 4132 Delivered LED Lumens 98.4 Delivered LED Lumens per Watt 			

REPLACEMENT PART	PART NO	NOTES
Clear Glass Lens	37028	
Black Glass Lens	3702824	

Don't see the configuration you are looking for?
Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.