

Silhouette

Architectural Indoor



A harmonious blend of style and functionality, Silhouette stands out as the epitome of decorative lighting. Its ceiling-mounted fabric drum-style design brings a touch of elegance, making it especially suited for multifamily residences and senior care facilities. Every detail, from the soft illumination to the high-quality fabric, is crafted with care, ensuring that spaces exude warmth and sophistication. With availability in a diverse range of sizes, it caters to bespoke requirements, allowing customers to choose the perfect fit for their space. For those desiring a blend of classic design with modern illumination, Silhouette is the quintessential choice.

LED Engine

- Color Temp (CCT):** 3000K, 3500K, 4000K
- CRI:** 80+ (consult factory for 90+)
- Life Expectancy:** L70 rated at 50,000+ hours
- Binning:** 3-step Macadam
- Output:** Min 2100 Source Lumens
Max 8075 Source Lumens

Driver

- Type:** Constant current, Class 2, 120-277 Vac, 50/60Hz
- Dimming:** 0-10V
- Efficiency:** Min 92%
- Operating Temp:** -40°C / -40°F to 50°C / 122°F
- FCC Noise:** Meets FCC Title 47 EMC Part 15 limits


Certifications

- Location Listing:** Damp Location Rated for Ceiling Mounting
- Other:** Buy America Compliant (Not EB/BB)

Construction


Mounting Pan: stamped steel with Hi-Reflectance white Powder Coat Finish. **Fabric:** wipeable decorative vinyl with embedded fabric. **Diffuser:** Luminous white acrylic diffuser. **Mounting:** Ceiling Mount Only; Mounts Directly to 4-inch Octangle junction box.

Dimensions

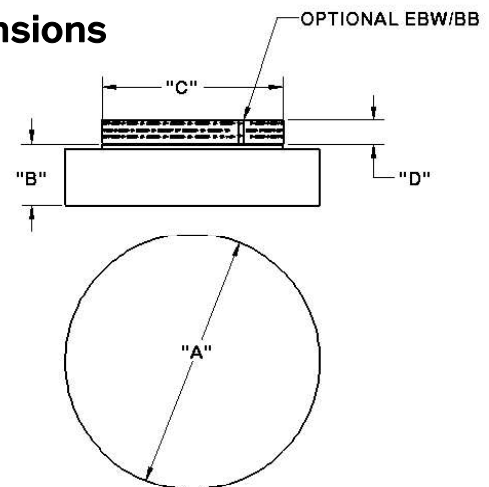

SILHOUETTE	"A"	"B"	"C"	"D"
SHRS12	12 1/4"	4 5/8"	N/A	N/A
SHRM15	15"	4 5/8"	12 3/4"	2 1/8"
SHRL19	19"	5 1/4"	17"	2 1/4"
SHRL24	24"	5 1/4"	17"	2 1/4"
SHRL30	30"	8 5/16"	22"	2"

Trim

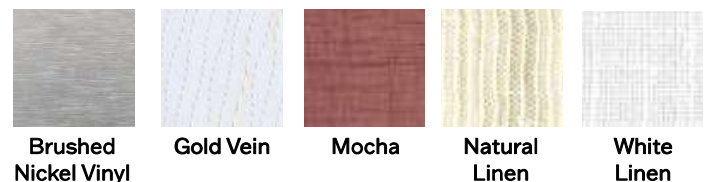

Catalog String

Fixture Core

SHRS

1

2

3

4

UNIV

5

Aesthetics & Options

6

7


8

Product Specifications

1 — Product Code	2 — Trim	3 — Wattage	4 — Dimming	5 — Voltage
12 - SHRS12 Small 15 - SHRM15 Medium 19 - SHRL19 Large 24 - SHRL24 Large 30 - SHRL30 Large	Not Applicable	L13.5 (12, 15, 19, 24, 30) L17.0 (12, 15, 19, 24, 30) L20.5 (12, 15, 19, 24, 30) L28.5 (19, 24, 30) L37.5 (19, 24, 30) L50.0 (30 Only)	ZE - 0-10V	UNIV - (120V-277V)
6 — Finish	7 — CCT	8 — Options		
GVN - Gold Vein MOC - Mocha NLN - Natural Linen WLN - White Linen BNV - Brushed Nickel (<i>Down light Only</i>)	30K - 3000K 35K - 3500K 40K - 4000K	BB - Back Box (Not Available on SHRL30) F - Fused EB/BB - Back Box Integral EM Battery (Not Available in L50.0)	SPD - Surge Protection Device STC12-WH - 12" Stem and Canopy Kit STC24-WH - 24" Stem and Canopy Kit STC36-WH - 36" Stem and Canopy Kit	

Performance

Wattage	Delivered Lumens (WLN)	Efficacy LM/W	CCT	Size
L13.5	1579	123	3000K	12
L17.0	1482	91		15
L20.5	1736	89		15
L28.5	3246	112		24
L37.5	2345	66		19
L50.0	5653	93		30



Polar Graph Details:

IES File Name: SHRL19-WLN-375-ZE-UNV-30K

Maximum Candela = 669 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)