

ECLIPSE S RNG LED

Architectural Indoor





PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES


- 120V Drivers Are Dimmable
- 18 Gauge Steel Fascia w/ Matte Silver Powder Coat Finish
- 277V Drivers Are Not Dimmable
- ADA Compliant
- CSA Listed Dry Location For Wall Mounting
- LED Light Fixture
- Luminous White Acrylic Lens
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- One 12.6W LED Driver Per 12.5W Module
- Open Top and Bottom
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish

LINE DRAWING

LINE DRAWING NOT TO SCALE

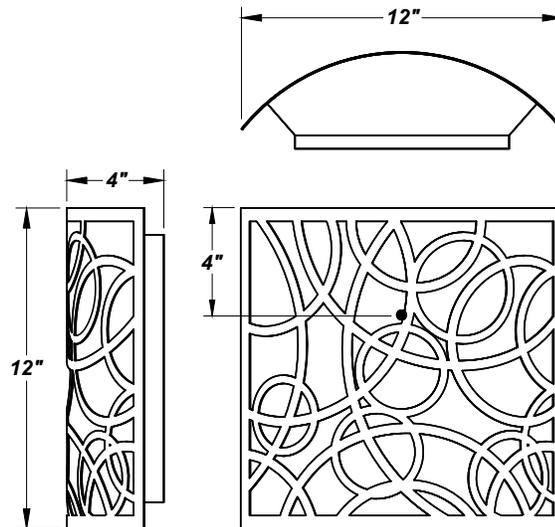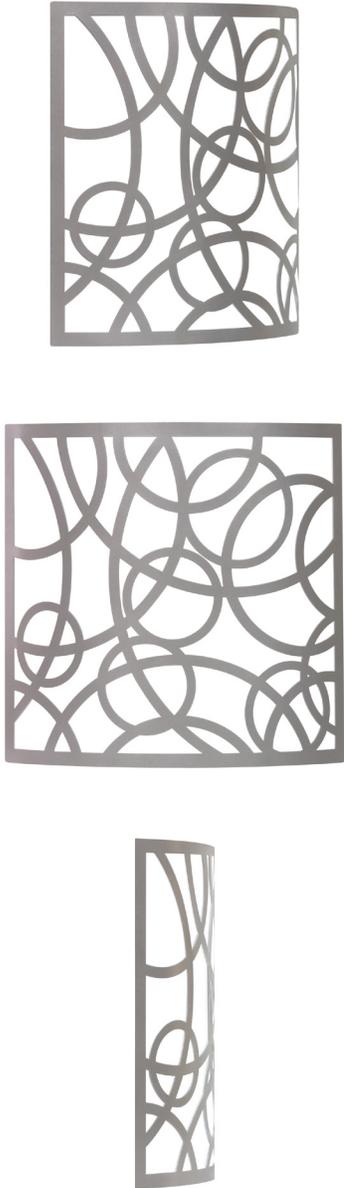

FINISHES

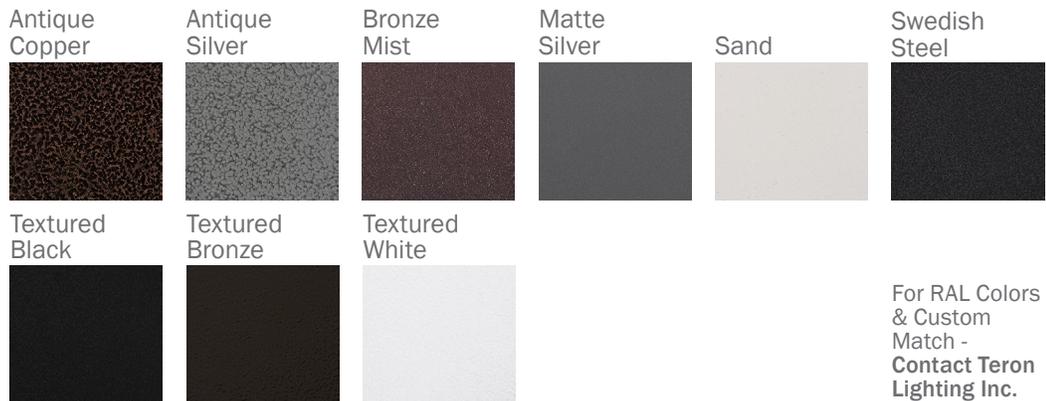

For RAL Colors & Custom Match - Contact Teron Lighting Inc.

ECLIPSE S RNG LED

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
ECLS - Eclipse S	L12.5 -LT350 - 12.5W @ 350mA Constant Current ELV Dimming Electronic Driver L25.0 -LT700 - 25.0W @ 700mA Constant Current ELV Dimming Electronic Driver	120V 270V (50 / 60Hz)	Not Applicable
ORDER INFO			
ECLS Example ^	L12.5	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
RNG - RNG Facia	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp	F - Fused
ORDER INFO			
Not Applicable Example ^	AC	30K	WAL

PROD	SOURCE	30K SPECS				
ECLS	L12.5	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 1195 LED Source Lumens 95.6 LED Source Lumens Per Watt 				
	L25.0	<ul style="list-style-type: none"> 80 CRI Typ. 30K - 3000K Color Temp 2390 LED Source Lumens 95.6 LED Source Lumens Per Watt 				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens	3097660	Dimmable to <5% 120V Dimmable With Either Triac or ELV Dimmers Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.